
AerWay®



Turf aeration so easy you can do it today without disrupting play

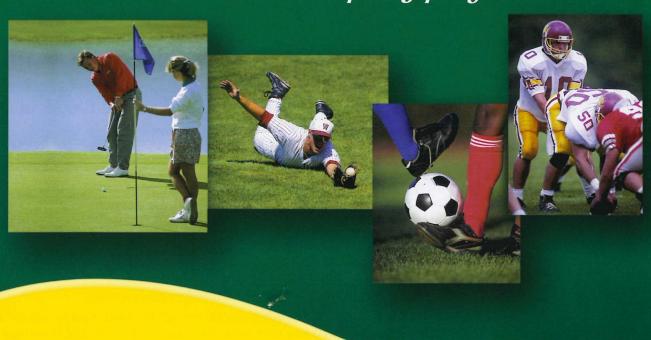

Five Year Factory Warranty

(See owner's manual for details)

AerWay's "Advanced Aeration Systems" offer you low cost, low maintenance, long lasting options for turf aeration



Shattertine[®] for use on roughs, fairways, tees and sports fields.

Only patented AerWay® Shattertines® lift and fracture tough soil to increase air, water, and nutrient movement.

As the AerWay[®] moves over the surface of the ground, the unique angles and offsets of the shattertines[®] crack and shatter compacted soil 7 inches and deeper, resulting in increased water percolation, microbial activity and fertilizer utilization. Plants respond with stronger root systems and healthier top growth.



Sportstine[®] for use on sports fields, fairways, tees and approaches.

The Sportstine® is a 6 inch long, heavy-duty venting aeration tine that can be fitted to any AerWay® frame.

Its usage is fast, effective and economical. It can even be used mid-season when the need is greatest and the "window of opportunity" exists. Sportstine[®] lets you aerate and play right away.



Finetine® for use on greens, tees, approaches, and fine turf.

The AerWay® deep Finetine® relieves surface compaction and penetrates up to 6 inches.

It can be combined with the Greens Express smoothing roller on most AerWay® frames for a fast venting aeration of greens and tees without any disruption of play, and there is no clean up. Eighteen greens can typically be aerated in about three hours.



Coring Tine[®] is ideal for use on fairways and sports fields where coring cultivaton is desired.

The Coring Tine[®] is used for dethatching and to prepare the soil for topdressing and overseeding. This is a 3/4" diameter, 4" long tine that can be used at high speed. They are available on 4", 5" and 6" centers and can be fitted into a variety of AerWay frames.



Super Finetine® for use on greens, tees, approaches, and fine turf.

The Super Finetine $^{\circledR}$ is designed to be used as a thatch managment tool.

The Super Finetine[®] accomplishes venting aeration through the thatch layer to maintain infiltration rates between verticutting and coring treatments. The Super Finetine is available with tine centers as close as 3" x 3" and it can be retrofitted on any AerWay frame. It's fast and there is no disruption in play when used with the smoothing roller.

AerWay® Options

Greens Express Smoothing Roller

The AerWay® Greens Express smoothing roller option allows the operator to lift the roller completely off the ground to leave the aeration holes open, or adjust tine penetration in less than one inch increments, or support the tined roller completely out of the ground for use exclusively as a smoothing roller.

The ability to vary the depth of tine penetration with each aeration ensures that an artificial barrier to water percolation will not develop. Research has shown that this can happen if aeration is done at the same depth each time.



Adjustable Roller Feature

On certain AerWay® models, the user has the ability to offset the rollers of the Shattertine® equipped units for renovation purposes.

This can be accomplished by changing two bolts on the outboard end of each roller. The manual unit has three positions of offset, 0, $2\ 1/2$ and 5 degrees.

Liquid Ballast Tank

Ta

The new liquid ballast tank, standard on all AerWay® units, provides an easy and effective way to ballast the AerWay® for complete ground penetration. It comes complete with straps and an evacuation spout. The ballast tank should always be completely filled.

nk Length	Total Ballast
47"	650 lbs
62"	860 lbs
77"	1,040 lbs
92"	1,250 lbs



Aer

Electric / Hydraulic Power Pack

This option can be added to any AerWay pull-type frame for use with power units that are not equipped with remote hydraulic outlets. The unit is operated with a switch from the operators seat to raise or lower the transport wheels.

AerWay Bat-Wing Models - 12' and 15' widths.


Maximize your aeration area application and minimize time with the largest aerator available in the market today.

These AerWay units fold to a transport width under 8' for safe road transportation. They are available with all of the standard features and options, and can be fitted with any of the AerWay tines.



Selecting an AerWay® is like designing your own aerator

It's easy. Simply choose your frame style, select the appropriate tine and add the options for your application.

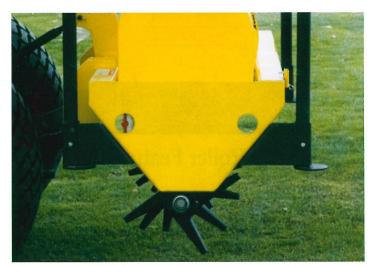

3-point Hitch

Standard Category 1, or 2 three-point hitch (depending on size) for basic sports turf and fairway aeration.

Model	Hp required	Weight (approx.)
45"	15-22 hp	977 lbs
60"	20-30 hp	1143 lbs
75"	25-35 hp	1223 lbs
90"	30-40 hp	1398 lbs

Standard Features:

- Bolt-on replaceable tines
- Built-in frame stands, ballast tank

Options:

- Shattertine®, Sportstine®, Finetine®, Coring Tine or Super Finetine®
- Greens Express Smoothing Roller kit
- 5" tine spacing (Sportstine® & Finetine® ONLY)
- Single or two roller
- Super Finetine® 3", 4", 5", 6" Tine spacing
- Coring Tine 4", 5", 6" Tine spacing



Hydraulic Tag-Along

Designed for use with tractors or utility vehicles. Pneumatic turf tires make transport convenient.

Model	Hp required	Weight (approx.)
45"	18-25hp	1194 lbs
60"	25-35 hp	1437 lbs
75"	30-40hp	1587 lbs
90"	35-50hp	1753 lbs

Standard Features:

- Bolt-on replaceable tines Ballast tank ■ Wheels/hydraulics ■ Safety lock out

Options:

- Electric / hydraulic power pack
- Shattertine®, Sportstine®, Finetine®, Coring Tine or Super Finetine®
- Clevis or ball
- Coring Tine 4", 5", 6" Tine spacing
- 5" tine spacing (Sportstine® & Finetine® ONLY)
- Greens Express Smoothing Roller kit
- Single or two roller
- Super Finetine® 3", 4", 5", 6" Tine spacing

SAF-Holland reserves the right to alter specifications without notice or obligation



AerWay® is manufactured by the SAF-HOLLAND

800-457-8310

www.aerway.com aerway@aerway.com

Patented: Cdn Nos. 1173286/84./582558 U.S. Nos. 4383580/4840232 other patents pending

SAF-HOLLAND Equipment Limited 20 Phebe Street, Norwich, Ontario NOJ 1P0 Tel: 519-863-3414 Fax: 519-863-2398

SAF-HOLLAND Canada Limited

17909 Roan Place, Surrey, B.C. V3S 5K1 Tel: 604-574-7491 Fax: 604-574-0244

SAF-Holland USA, Inc.

1301 Martinez Lane, Wylie, Texas 75098 Tel: 972-442-1761 Fax: 972-442-2092