

# FASTCAT™ PRO ZERO-TURN

## COMMERCIAL-GRADE QUALITY

Rugged DuraDeck™ design makes the FastCat Pro tough enough to handle everything commercial jobs dish out. Meanwhile, your choice of Kawasaki® FX Series engines and a new 2011-compliant fuel system powers this zero-turn mower to higher productivity. Bring it on.




The Flex-Suspension seat provides a more comfortable ride



Intuitive control panel includes new QuickScan monitor

Two Hydro-Gear® commercial-grade ZT-3100 independent drives provide smooth maneuverability

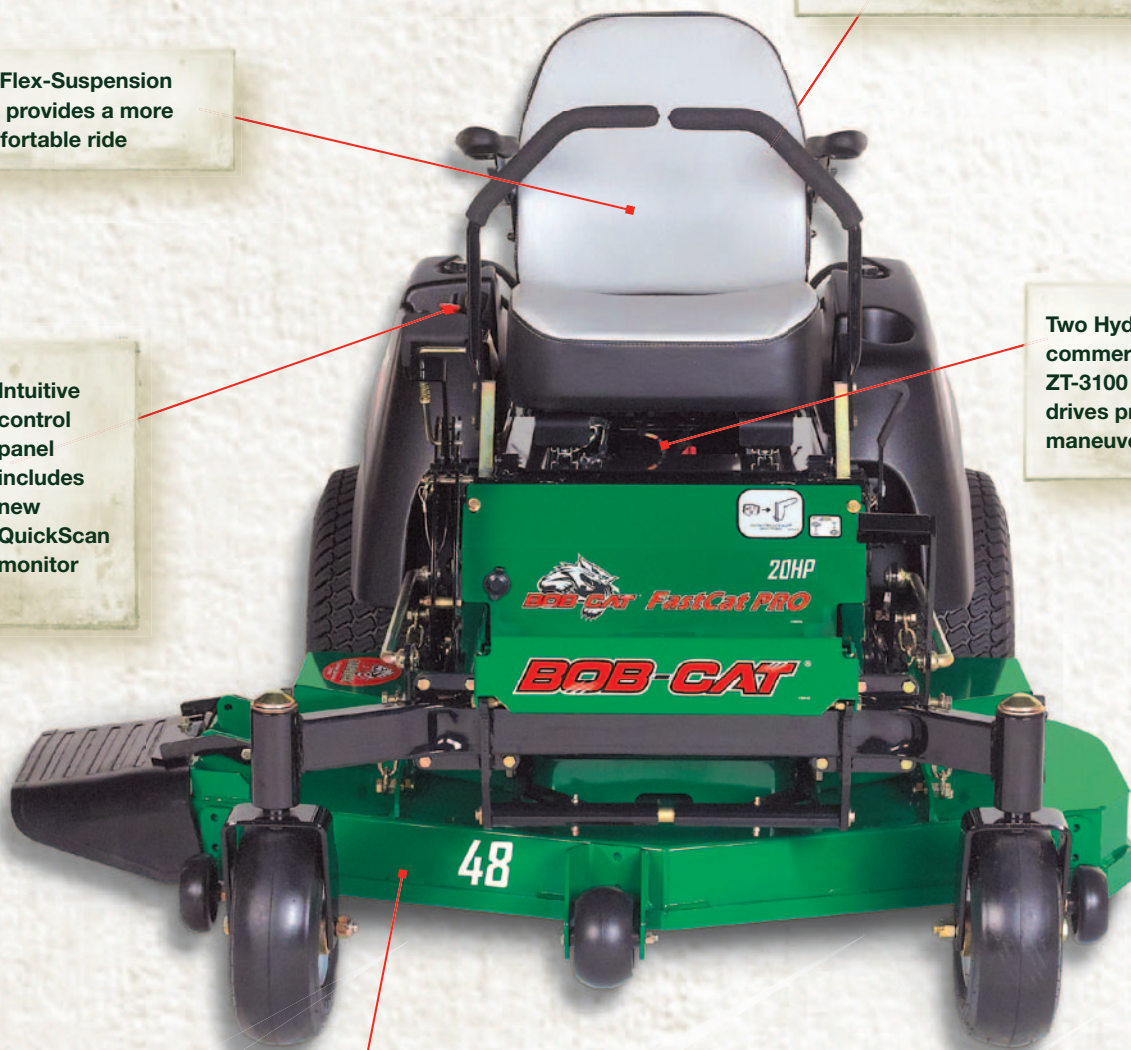

Same DuraDeck™ as the Predator-Pro and ProCat

Full 2 year/2,000 hour or 5 year/500 hour front-to-back warranty, excluding wear items, from date of purchase by the original owner.

[bobcatturf.com](http://bobcatturf.com)





		FastCat Pro	FastCat Pro	FastCat Pro
	Model	942297G	942302G	934298G
<b>Engine</b>	Make	Kawasaki® FX 541V	Kawasaki® FX600V	Kawasaki® FX600V
	Displacement*	603 cc [36.8 cu. in.]	603 cc [36.8 cu. in.]	603 cc [36.8 cu. in.]
	Lubrication	Full pressure — Spin-on filter		
	Air Filtration System	Standard cartridge type		
<b>Deck</b>	Deck Size	36"	42"	48"
	Blade Tip Speed	18,142 fpm @ 3550 engine rpm	18,809 fpm @ 3550 engine rpm	16,378 fpm @ 3550 engine rpm
	Deck Design	Fabricated 7-gauge top deck plus 7-gauge reinforcements — Reinforced front lip		
	Deck Skirts	7-gauge skirts		
	Spindle Type	Top mounted 7" diameter — 6 bolt maintenance-free with 1" shaft and split steel pulleys		
	Spindle Bearings	Double-sealed, precision ground ball bearings		
	Cutting Height	1.5" - 4.875"		
	Deck Lift Type	Manual with quick-lift-foot assist		
	Deck Drive	125 lb. ft. Warner electric clutch — Singe drive belt		
<b>Drive</b>	Transmission	- Hydro-Gear ZT-3100 commercial-duty hydrostatic drive transaxles - 10 cc variable displacement pumps		
	Pump Size	10 cc		
	Ground Speed	8 mph forward/3.5 mph reverse		
<b>Tires</b>	Front Tires	11 x 4.00-5 4-ply		
	Rear Tires	20 x 6.50-12	20 x 6.50-12	20 x 8-10
	Parking Brake	Internal integrated parking brake		
<b>Fuel</b>	Fuel Capacity	9 Gallons		
	Hour Meter	Digital — Standard		
<b>Size</b>	Height	46" [66" with folding ROPS up]		
	Length	79"	79"	76"
	Weight/Wet	705 lbs	744 lbs	766 lbs

\* Power ratings are provided by the engine manufacturer. Actual power output is dependent upon many factors including engine rpm, air density and engine conditions. For further information, contact Technical Service at Schiller Grounds Care, Inc at 877-596-6337.

**Your Local Dealer is**

Specifications while correct at the time of printing may change without notice.  
BOB-CAT® is registered trademark of Schiller Grounds Care, Inc.  
© 2011 Schiller Grounds Care, Inc. All Rights Reserved.  
One BOB-CAT Lane, Johnson Creek, WI 53038  
www.bobcatturf.com • 920-699-2000