



# **WALLENSTEIN**



**MAKING  
WORK FEEL  
—  
MORE LIKE  
PLAY**



# TABLE OF CONTENTS



**CHIPPERS & CHIPPER/SHREDDERS**

**3**



**COMMERCIAL CHIPPERS**

**19**



**LOG SPLITTERS**

**25**



**FIREWOOD PROCESSORS**

**45**



**SKIDDING WINCHES & SKIDDING PLATES**

**51**



**TRAILERS & LOG LOADERS**

**59**



**LOG GRAPPLES**

**69**



**MANURE SPREADERS**

**77**



**BACKHOES**

**83**



**GENERATORS**

**95**





# CHIPPERS & CHIPPER/SHREDDERS

3-POINT HITCH | SKIDSTEER | TRAILER | CART





# 3-POINT HITCH CHIPPERS & CHIPPER/SHREDDERS

## PRODUCT FEATURES



**Oversized Heavy Duty Rotor**



**Hardened Reversible Knives**



**Adjustable Exit Chute**



**270° or 360° Exit Chute**

See product specs for details.



**Angled Rotor**

Angling the log against the rotor requires less horsepower to chip, saving fuel.



**Shear Bolt Protected PTO Drive Train**

BX Chippers are direct drive, no belts or pulleys. BXM models use belts and pulleys.



**Bearing Plate Protection**

Keeps wood chips from getting into the bearing and causing damage. (Excludes BXM Models)



**Self Feeding Chipper Hopper**

The self-feed hopper pulls the branches in as it chips using the knife angle and gravity.



**Adjustable Height Ski Base**

Adjust to match your tractor's PTO height. (BX36S & BX52 Models)



**Fold Up Feed Hopper**

For easy transport. No tools required. (BX52/72/102 Models)



**Chop Block**

Exclusive Chop Block uses an anvil action to finely process material. (BXM Models)



**Single Chute**

Chipper & Shredder use the same 360° exit chute. (BXM Models)






### Dual Active Rollers

Hydraulically powered top and bottom feed rollers grip and pull brush directly into the chipper. (Hydraulic feed models)



### Slab Style Opening

Slab style opening easily receives awkward branches and reduces the amount of trimming required before chipping.

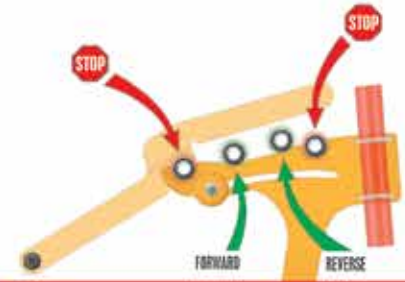


### Safety Control Bar

Forward/reverse control with two stop positions. (Hydraulic feed models)



### Easy Start Tension Relief

Easier starting of flat faced logs. (Hydraulic feed models)

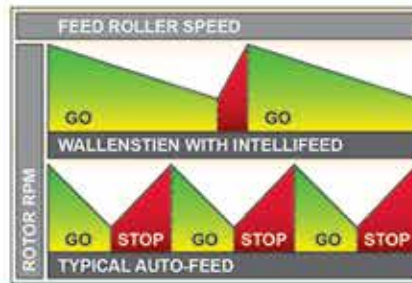

### IntelliFeed

IntelliFeed monitors the rotor's rpm adjusting the feed speed as needed to maximize productivity.



## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models





# BXS

## 3PH SELF-FEED CHIPPERS



### BX36S

**35"**  
CHIPPING  
CAPACITY

- 3.5" Diameter Capacity
- 12-30 HP Range
- 25-30 HP Required for Max. Capacity
- 3.5" x 9" Chipper Housing Opening
- 25" Rotor with 4 Knives at 96 lbs.
- Dimensions (LxWxH) 55" x 46" x 60"
- 60" Discharge Hood Height, 270° Rotation
- 395 lbs. Total Weight
- PTO Height: 13.44" to 19.0" (Adjustable)
- Cat I, iMatch™ & quick hitch compatible

BX36S

**\$2,999**


### BX52S

**5"**  
CHIPPING  
CAPACITY

- 5" Diameter Capacity
- 18-50 HP Range
- 40-45 HP Required for Max. Capacity
- 5" x 10" Chipper Housing Opening
- 25" Rotor with 4 Knives at 125 lbs.
- Dimensions (LxWxH) 43" x 55" x 66"
- 66" Discharge Hood Height, 270° Rotation
- 505 lbs. Total Weight
- PTO Height: 13.4" to 19.0" (Adjustable)
- Cat I, iMatch™ & quick hitch compatible

BX52S

**\$3,785**

Quick Hitch and iMatch™ systems may require longer PTO shafts for optimum and safe performance, replacements are not available from Wallenstein and must be made at the customers expense.  
iMatch™ systems require adaptor bushings not available from Wallenstein and must be purchased at the customers expense.

Wallenstein 2018 Product Catalogue

All prices are MSRP and subject to applicable taxes. Prices, availability and specifications are subject to change without notice. Products may not be exactly as shown.



Directly connected to your tractor's PTO, power is transferred straight into chipping. The self-feed hopper pulls the branches in as it chips using the knife angle and gravity.



## BX72S



- 7" Diameter Capacity
- 35-100 HP Range
- 65-75 HP Required for Max. Capacity
- 7" x 12" Chipper Housing Opening
- 28" Rotor with 4 Knives at 175 lbs.
- Dimensions (LxWxH) 64" x 70" x 82"
- 82" Discharge Hood Height, 270° Rotation
- 728 lbs. Total Weight
- PTO Height: 19.0"
- Cat I, iMatch™ & quick hitch compatible

BX72S  
**\$5,407**



## BX102S



- 10" Diameter Capacity
- 65-150 HP Range
- 90-120 HP Required for Max. Capacity
- 10" x 15" Chipper Housing Opening
- 36" Rotor with 4 Knives at 400 lbs.
- Dimensions (LxWxH) 71" x 71" x 89"
- 89" Discharge Hood Height, 270° Rotation
- 1143 lbs. Total Weight
- PTO Height: 23.0"
- Cat II, iMatch™ & quick hitch compatible

BX102S  
**\$7,695**

Quick Hitch and iMatch™ systems may require longer PTO shafts for optimum and safe performance, replacements are not available from Wallenstein and must be made at the customers expense. iMatch™ systems require adapter bushings not available from Wallenstein and must be purchased at the customers expense.

All prices are MSRP and subject to applicable taxes. Prices, availability and specifications are subject to change without notice. Products may not be exactly as shown.



# BXR 3PH HYDRAULIC ROLLER FEED CHIPPERS



## BX52R



- 5" Diameter Capacity
- 18-50 HP Range
- 40-45 HP Required for Max. Capacity
- 30-35 HP Required for Max. Capacity (BX52RI)
- 5" x 10" Chipper Housing Opening
- 25" Rotor with 4 Knives at 125 lbs.
- Dimensions (LxWxH) 62" x 61" x 74"
- 74" Discharge Hood Height, 270° Rotation
- 845 lbs. Total Weight
- PTO Height: 21.5" to 27.0" (adjustable)
- Cat I, iMatch™ & quick hitch compatible
- Requires Min. 3-6 gpm Hydraulic Flow

BX52RI: Includes Intellifeed\*

BX52R	BX52RI
<b>\$6,794</b>	<b>\$8,530</b>

\*Requires 12V from tractor.



## BX72R



- 7" Diameter Capacity
- 40-80 HP Range
- 60-70 HP Required for Max. Capacity
- 45-50 HP Required for Max. Capacity (BX72RI)
- 7" x 12" Chipper Housing Opening
- 28" Rotor with 4 Knives at 185 lbs.
- Dimensions (LxWxH) 83" x 56" x 90"
- 90" Discharge Hood Height, 270° Rotation
- 1300 lbs. Total Weight
- PTO Height: 26"
- Cat I, iMatch™ & quick hitch compatible
- Requires Min. 3-6 gpm Hydraulic Flow

BX72RI: Includes Intellifeed\*

BX72R	BX72RI
<b>\$9,733</b>	<b>\$11,541</b>

Quick Hitch and iMatch™ systems may require longer PTO shafts for optimum and safe performance, replacements are not available from Wallenstein and must be made at the customers expense.  
iMatch™ systems require adapter bushings not available from Wallenstein and must be purchased at the customers expense.

Wallenstein 2018 Product Catalogue

All prices are MSRP and subject to applicable taxes. Prices, availability and specifications are subject to change without notice. Products may not be exactly as shown.



With hydraulic powered feed rollers, branches, limbs, and brush are control fed for continuous chipping at maximum capacity.



## BX102R



- 10" Diameter Capacity
- 65-150 HP Range
- 90-120 HP Required for Max. Capacity
- 80-90 HP Required for Max. Capacity (BX102RI, BX102RPI)
- 10"H x 17"W Chipper Housing Opening
- 36" Rotor with 4 Knives at 425 lbs.
- Dimensions (LxWxH) 108" x 87" x 100"
- 95" Discharge Hood Height, 270° Rotation
- 2000 lbs. Total Weight
- PTO Height 34.0"
- Cat II, iMatch & quick hitch compatible
- Requires Min. 4-8 gpm Hydraulic Flow

**BX102RI:** Includes Intellifeed\*

**BX102RP:** Includes Hydraulic Winch and Top Roller Hydraulic Lift

**BX102RPI:** Includes Intellifeed, Hydraulic Winch, and Top Roller Hydraulic Lift\*

BX102R	BX102RI	BX102RP	BX102RPI	
<b>\$12,221</b>	<b>\$13,951</b>	<b>\$14,709</b>	<b>\$16,439</b>	*Requires 12V from tractor.

Quick Hitch and iMatch™ systems may require longer PTO shafts for optimum and safe performance, replacements are not available from Wallenstein and must be made at the customers expense.

iMatch™ systems require adaptor bushings not available from Wallenstein and must be purchased at the customers expense.

All prices are MSRP and subject to applicable taxes. Prices, availability and specifications are subject to change without notice. Products may not be exactly as shown.





# BXM

## 3PH CHIPPER/SHREDDERS

Connected to your tractor's PTO, quickly turn limbs, branches, and debris up to 4" in diameter into valuable chips or mulch.



### BXM32



- 3" Diameter Chipping Capacity
- 1" Shredding Capacity
- 12-35 HP Range
- 25-30 HP Required for Max. Capacity
- 3" x 6" Chipper Housing Opening
- 10" x 10" Shredder Housing Opening
- 17.5" Rotor with 2 Knives at 70 lbs.

- 27 Shredder Knives
- Dimensions (LxWxH) 54" x 36" x 60"
- 56.5" Discharge Hood Height, 360° Rotation
- 445 lbs. Total Weight
- PTO Height: 10.7"
- Cat I, iMatch™ & quick hitch compatible

BXM32  
**\$3,872**



### BXM42



- 4" Diameter Chipping Capacity
- 2" Shredding Capacity
- 30-90 HP Range
- 35-50 HP Required for Max. Capacity
- 4" x 10" Chipper Housing Opening
- 10.5" x 10.5" Shredder Housing Opening
- 25" Rotor with 2 Knives at 170 lbs.

- 30 Shredder Knives
- Dimensions (LxWxH) 72" x 44" x 62"
- 58" Discharge Hood Height, 360° Rotation
- 800 lbs. Total Weight
- PTO Height: 27"
- Cat I, iMatch™ & quick hitch compatible

BXM42  
**\$5,309**



# BXH SKIDSTEER CHIPPERS

Get the most out of your equipment with the practical BXH42 skidsteer mounted wood chipper. The hydraulic driven rotor on the self-feed BXH42 is powered directly from the skidsteer's external ports, providing plenty of chipping action.

CHIPPERS / SHREDDERS



## BXH42

- 4" Diameter Chipping Capacity
- 20-30 gpm Flow Range
- 25 gpm Recommended Flow
- 4" x 10" Chipper Housing Opening
- 25" Rotor with 2 Knives at 74 lbs
- Dimensions (LxWxH) 80" x 57" x 72"
- 65" Discharge Hood Height, 360° Rotation
- 740 lbs Total Weight
- Universal Skidsteer Mounting Plate

BXH42  
\$7,035





# TRAILER CHIPPERS & CHIPPER/SHREDDERS

## PRODUCT FEATURES



**Oversized Heavy Duty Rotor**



**Self Feeding Chipper Hopper**

The self-feed hopper pulls the branches in as it chips using the knife angle and gravity.



**Belt Driven Rotor**



**Centrifugal Clutch**


Engages with engine rpm.



**Electric Start**

(Excludes BXMT3209)



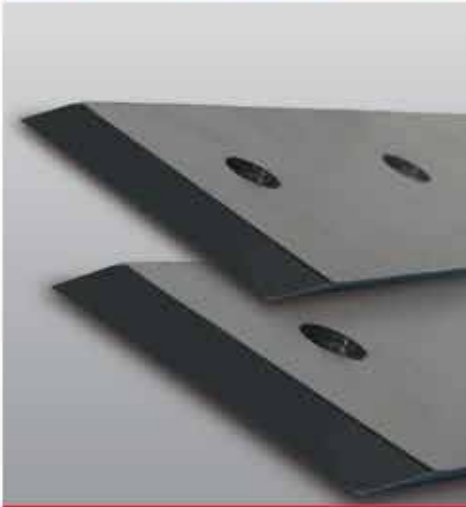

**Hardened Reversible Knives**



**Highway Travel**

With 2" ball hitch and full trailer lighting.  
(Excludes BXMT3209)



**Torflex® Suspension Axles**

For smoother towing. (Excludes BXMT3209)



**360° Exit Chute**



**Chop Block**

Exclusive Chop Block uses an anvil action to finely process material. (BXMT Models)



**Single Chute**

Chipper and shredder use the same 360° exit chute.  
(BXMT Models)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED



-ORA



-GRN



-BLU



-YEL



-GRY



-BLK



# BXMT TRAILER CHIPPER/SHREDDERS

Easily connected to your truck, ATV, or side-by-side, the trailer style BXMT chipper/shredder turns branches and brush into valuable mulch for flower beds. Available for highway travel, the BXMT is ideal for landscapers or rural property owners.



POWERED by  
**HONDA**

POWERED by  
**HONDA KOHLER**



## BXMT3209

**3"**  
CHIPPING  
CAPACITY

**1"**  
SHREDDING  
CAPACITY

- 3" Diameter Chipping Capacity
- 1" Shredding Capacity
- 270 CC Honda GX270 Engine
- 3" x 6" Chipper Housing Opening
- 10" x 10" Shredder Housing Opening

- 17.5" Rotor with 2 Knives at 70 lbs.
- 27 Shredder Knives
- Dimensions (LxWxH) 58" x 44" x 56"
- 55.5" Discharge Hood Height, 360° rotation
- 400 lbs. Total Weight
- 4.10 x 6 Tire Size



## BXMT3213

**3"**  
CHIPPING  
CAPACITY

**1"**  
SHREDDING  
CAPACITY

- 3" Diameter Chipping Capacity
- 1" Shredding Capacity
- 389 CC Honda GX390 Engine
- 3" x 6" Chipper Housing Opening
- 10" x 10" Shredder Housing Opening

- 17.5" Rotor with 2 Knives at 70 lbs.
- 27 Shredder Knives
- Dimensions (LxWxH) 60" x 44" x 58"
- 56.25" Discharge Hood Height, 360° rotation
- 520 lbs. Total Weight
- 4.80 x 8 Tire Size



## BXMT 4224/4238

**4"**  
CHIPPING  
CAPACITY

**2"**  
SHREDDING  
CAPACITY

- 4" Diameter Chipping Capacity
- 2" Shredding Capacity
- 4" x 10" Chipper Housing Opening
- 10.5" x 10.5" Shredder Housing Opening
- 25" Rotor with 2 Knives at 170 lbs.

- 30 Shredder Knives
- Dimensions (LxWxH) 84" x 64" x 64"
- 73.75" Discharge Hood Height, 360° rotation
- 1080 lbs. Total Weight
- 6.50 x 8 Tire Size
- Built-in Tool Box

BXMT4224: 690 CC Honda GX690 Engine  
BXMT4238: 999 CC Kohler CH980 Engine

BXMT3209  
**\$4,599**

BXMT3213  
**\$5,683**

BXMT4224  
**\$10,922**

BXMT4238  
**\$12,650**



# BXT TRAILER CHIPPERS

Pickup and go wherever you need it with the trailer style BXT wood chipper. Turn unwanted branches up to 6 inches in diameter into useful wood chips. The BXT is built for professional landscapers, yet ideal for maintaining your rural property.



POWERED by  
**HONDA**

POWERED by  
**HONDA KOHLER**



## BXT4213



- 4" Diameter Chipping Capacity
- 389 CC Honda GX390 Engine
- 4" x 10" Chipper Housing Opening
- 25" Rotor with 2 Knives at 74 lbs.
- Dimensions (LxWxH) 72" x 59" x 72"
- 72" Discharge Hood Height, 360° rotation
- 785 lbs. Total Weight
- 4.80 x 8 Tire Size
- Built-in Tool Box

BXT4213  
**\$8,063**



## BXT4224



- 4" Diameter Chipping Capacity
- 688 CC Honda GX690 Engine
- 4" x 10" Chipper Housing Opening
- 25" Rotor with 2 Knives at 74 lbs.
- Dimensions (LxWxH) 72" x 59" x 72"
- 72" Discharge Hood Height, 360° rotation
- 825 lbs. Total Weight
- 4.80 x 8 Tire Size
- Built-in Tool Box

BXT4224  
**\$10,211**



## BXT6224/6238



- 6" Diameter Chipping Capacity
- 6.5" x 12" Chipper Housing Opening
- 30" Rotor with 4 Knives at 197 lbs.
- Dimensions (LxWxH) 86" x 75" x 88"
- 88" Discharge Hood Height, 360° rotation
- 1365 lbs. Total Weight
- 20.50 x 8-10 Tire Size
- Built-in Tool Box

BXT6224: 688 CC Honda GX690 Engine  
BXT6238: 999 CC Kohler CH980 Engine

BXT6224  
**\$12,143**

BXT6238  
**\$13,909**



# CART CHIPPERS & CHIPPER/SHREDDERS

## PRODUCT FEATURES



### 5 Second Stop Brake Clutch

Stops the rotor almost instantly, a great safety feature.



### Honda Engine

196 CC Honda GX200 engine.




### Rubber Tires

4.10 x 3.5 Tires for easy transport.



### Blower Discharge

(BXC34 & BXMC34B)

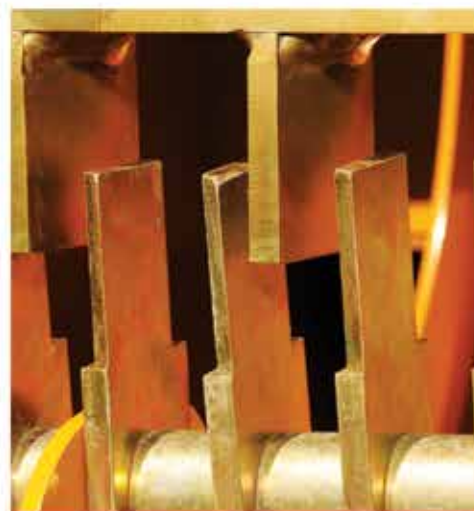

### Chop Block

Exclusive Chop Block uses an anvil action to finely process material. (BXMC Models)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED



-ORA



-GRN



-BLU



-YEL



-GRY



-BLK



# BXC/BXMC

## CART CHIPPERS & CHIPPER/SHREDDERS

Great for small property owners. Lightweight and portable, easily take it wherever you need to make quick work of branches, brush, and leaves.

CHIPPERS / SHREDDERS



POWERED by  
**HONDA**™



### BXC34



- 3" Diameter Chipping Capacity
- 196 CC Honda GX200 Engine
- 4" x 4.25" Chipper Housing Opening
- 17" Rotor with 2 Knives at 28 lbs.
- Dimensions (LxWxH) 49" x 35.25" x 43.5"
- Blower Discharge with Positional Deflector
- 213 lbs. Total Weight
- 4.10 x 3.5 Tire Size

BXC34  
**\$2,079**



### BXMC34S



- 3" Diameter Chipping Capacity
- 0.75" Shredding Capacity
- 196 CC Honda GX200 Engine
- 3.5" x 5" Chipper Housing Opening
- 6" x 7" Shredder Housing Opening
- 14" Rotor with 2 Knives at 28 lbs.
- 8 Shredder Knives
- Dimensions (LxWxH) 43" x 37" x 47"
- Screen Discharge with 1.5" Round Screen Included
- 250 lbs. Total Weight
- 4.10 x 3.5 Tire Size

BXMC34S  
**\$2,378**



### BXMC34B



- 3" Diameter Chipping Capacity
- 0.75" Shredding Capacity
- 196 CC Honda GX200 Engine
- 3.5" x 5" Chipper Housing Opening
- 6" x 7" Shredder Housing Opening
- 16" Rotor with 2 Knives at 40 lbs.
- 12 Shredder Knives
- Dimensions (LxWxH) 43" x 40" x 49"
- Blower Discharge
- 270 lbs. Total Weight
- 4.10 x 3.5 Tire Size

BXMC34B  
**\$2,595**



# CHIPPER & CHIPPER SHREDDER ACCESSORIES



## Reversible Rotor Knife



**1056M303** \$32  
Current Models: BXM32, BXMT3209, BXMT3213, BXC34, BXMC34S, BXMC34B  
Previous Models: BX32S, BXMT3209SU, BXMT3214SU, BXC32, BXC32H, BXMC32S, BXMC32SH, BXMC32B, BXMC32BH

**1011M103** \$61  
Current Models: BX36S, BX52S, BX52R, BXM42, BXH42, BXMT4224, BXMT4238, BXT4213, BXT4224  
Previous Models: BX42S, BX42R, BXMT4228SU, BXT4214SU, BXT4228SU

**1012M203** \$128  
Current Models: BX72S  
Previous Models: BX62S, BX62R

**1053M303** \$105  
Current Models: BX72R, BXT6224, BXT6238  
Previous Models: BXT6228SU

**1019M903** \$112  
Current Models: BX102S, BX102R  
Previous Models: BX92S, BX92R

## Ledger Knife




**1056M304** \$38  
Current Models: BXM32, BXMT3209, BXMT3213, BXC34, BXMC34S, BXMC34B  
Previous Models: BX32S, BXMT3209SU, BXMT3214SU, BXC32, BXC32H, BXMC32S, BXMC32SH, BXMC32B, BXMC32BH

**1011M104** \$54  
Current Models: BX36S, BX52S, BX52R, BXM42, BXH42, BXMT4224, BXMT4238, BXT4213, BXT4224  
Previous Models: BX42S, BX42R, BXMT4228SU, BXT4214SU, BXT4228SU

**1012M204** \$121  
Current Models: BX72S, BX72R, BXT6224, BXT6238  
Previous Models: BX62S, BX62R, BXT6228SU

**1019M904** \$135  
Current Models: BX102S, BX102R  
Previous Models: BX92S, BX92R

## Ledger Knife Clearance Gauge

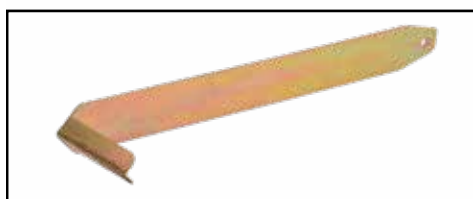

**1012L269** \$22  
For use on all Chippers


## Shredder Knife



**1056M108** \$8  
Current Models: BXM32, BXMT3209, BXMT3213, BXMC34S, BXMC34B  
Previous Models: BXMT3209SU, BXMT3214SU, BXMC32S, BXMC32SH, BXMC32B, BXMC32BH

**1016M608** \$7  
Current Models: BXM42, BXMT4224, BXMT4238  
Previous Models: BXMT4228SU

## Screens

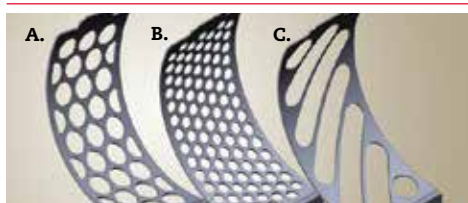

**A. 1074L250** 1.5" Round Screen \$76

**B. 1071L240** 0.75" Round Screen \$88

**C. 1074L260** 1.5" Wet Screen \$69

Current Models: BXMC34S  
Previous Models: BXMC32S, BXMC32SH

## Trailer Hitch



**1082A355** \$151  
Current Models: BXC34, BXMC34S, BXMC34B  
Previous Models: BXMC32S, BXMC32SH, BXMC32B, BXMC32BH

## Mulch Collector Bag



**Z99006** \$205  
Current Models: BXC34, BXMC34B  
Previous Models: BXC32, BXC32H, BXMC32B, BXMC32BH

## Self-Contained PTO Power Pack



**C3540** \$2,361  
Current Models: BX52R, BX72R  
Previous Models: BX42R, BX62R

**C4550** \$2,406  
Current Models: BX102R  
Previous Models: n/a

## 30" Discharge Height Extension



**CHE100** \$524  
Available in black only.  
1000 rpm recommended PTO speed for discharge height extension.  
Current Models: BX72S, BX102S, BX72R, BX72RI, BX102R, BX102RI, BX102RP, BX102RPI  
Previous Models: n/a

## Biomass Kit



Available in black only.  
1000 rpm required PTO speed for biomass kit.  
Optional PTO shafts for tractors using 21 spline PTO at 1000 rpm.

**CBM100** \$398  
Current Models: BX72R, BX72RI  
Previous Models: n/a  
**CBM200** \$416  
Current Models: BX102R, BX102RI, BX102RP, BX102RPI  
Previous Models: n/a

## PTO Shafts



**Z44506** \$589  
PTO Shaft -series B5 x 55-1/4" x 21 Spline  
Current Models: BX52R, BX52RI, BX72R, BX72RI  
Previous Models: BX42R, BX62R

**Z44803** \$589  
PTO Shaft -series B8 x 40" x 21 Spline  
Current Models: BX102R, BX102RI, BX102RP, BX102RPI  
Previous Models: BX92R







## COMMERCIAL CHIPPERS





# COMMERCIAL CHIPPERS

## PRODUCT FEATURES

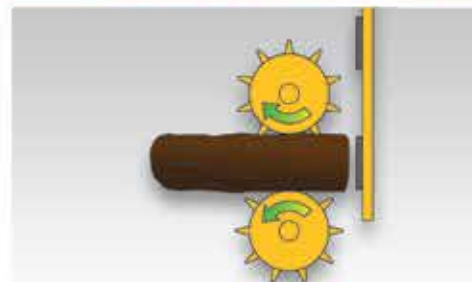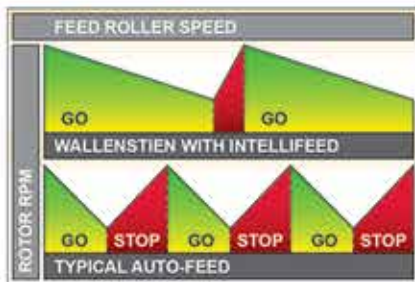

### IntelliFeed

IntelliFeed monitors the rotor's rpm adjusting the feed speed as needed to maximize productivity.

### Rapid Recovery Auto Reverse

If the chipper's RPM reaches its minimum setting, it reverses the log away from the rotor allowing the RPM to increase.



### Easy Start Tension Relief

For starting flat-faced logs, delay spring-loaded tension, making it easier for the top roller to climb over the log.



### Dual Active Rollers

Hydraulically powered top and bottom feed rollers grip and pull brush directly into the chipper.



### Slab Style Opening

Slab style opening easily receives awkward branches and reduces the amount of trimming required before chipping.




### Angled Rotor

Angling the log against the rotor requires less horsepower to chip, saving fuel.



### 360° Swivel Exit Chute

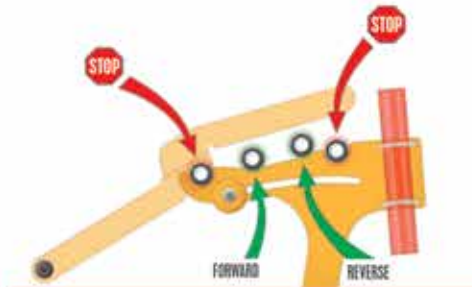

### Safety Control Bar

Forward/reverse control with two stop positions.



### Top Roller Hydraulic Lift

Lifting the top roller to easily start logs, then applying an extra 1800 lbs. of force. (CR100H & CR100HW)



### Hydraulic Winch

1200 lbs. of pulling capacity and a 50' synthetic rope. (CR100HW)



### Hand Clutch

The heavy duty hand clutch harnesses power into action, giving you mechanical control of the chipper. (CR70D, CR70TD & CR100 models)



**Highway Tires****Torflex Suspension**

For smoother towing.

**Electric Brakes**

Eliminates extra brake load on vehicle.  
(Excludes BXTR6438F)

**Signal Lights**

Full trailer lighting.

**Kohler Gas Engine**

V-twin cylinder, air cooled, horizontal shaft.

**Kubota Diesel Engines**

Reliable and fuel efficient. Easily accessible for routine maintenance.

**Auto Engage Fluid Coupler**

Heavy duty system engages with engine rpm. Features overheat protection. (BXTR6438F, BXTR6438P, & CR70)

**Double Banded B-Belt**

Efficiently transferring energy is a B-belt & pulley system configured for high torque. (BXTR & CR70 models)

**Quad B-Belt**

Efficiently transferring energy is a B-belt & pulley system configured for high torque. (CR100 models)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



# BXTR/CR COMMERCIAL CHIPPERS

INDUSTRIAL CHIPPERS



## KOHLER



### BXTR6438F



- 7" Diameter Chipping Capacity
- 999 CC Kohler CH980 Engine
- 7" x 11" Chipper Housing Opening
- 30" Rotor with 4 Knives at 197 lbs.
- Dimensions (LxWxH) 148.5" x 64" x 100"
- 91" Discharge Hood Height, 360° rotation
- 2225 lbs. Total Weight
- ST205/75R14 Tire Size
- IntelliFeed
- Auto Engage Fluid Coupler
- Built-in Tool Box
- 2" Ball Hitch

BXTR6438P: Includes Electric Brakes

BXTR6438F | BXTR6438P  
**\$24,359 | \$24,814**



Tree services and municipalities are cleaning up with Wallenstein's line of commercial chippers. Built for professional use, this heavy duty series is ready to handle branches up to 10" in diameter.



INDUSTRIAL CHIPPERS

# KOHLER

# Кубота



## CR70



- 7" Diameter Chipping Capacity
- 7" x 12" Chipper Housing Opening
- 28" Rotor with 4 Knives at 190 lbs.
- Dimensions (LxWxH) 160" x 65.5" x 98.65" (CR70)
- 173" x 65.5" x 98.65" (CR70D/CR70TD)
- 98.65" Discharge Hood Height, 360° rotation
- 2750 lbs. Total Weight (CR70)
- 3440 lbs. Total Weight (CR70D/CR70TD)
- ST205/75R14 Tire Size
- Built-in Tool Box
- 2.5" Pintle Hitch

CR70: 999 CC Kohler CH980 Engine, Auto Engage Fluid Coupler  
 CR70D: 1498 CC Kubota V1505 Diesel Engine, Twin Disc Hand Clutch  
 CR70TD: 1498 CC Kubota V1505T Turbo Diesel Engine, Twin Disc Hand Clutch

Contact an Authorized Wallenstein Dealer for Pricing.

# Кубота



## CR100



- 10" Diameter Chipping Capacity
- 3620 CC Kubota V3600-T-E3 Turbo Diesel Engine
- 10" x 17" Chipper Housing Opening
- 36" Rotor with 4 Knives at 425 lbs.
- Dimensions (LxWxH) 196" x 72" x 100"
- 100" Discharge Hood Height, 360° rotation
- 5000 lbs. Total Weight
- ST235/80R16 Tire Size
- Twin Disc Hand Clutch
- Built-in Tool Box
- 2.5" Pintle Hitch

CR100H: Includes Hydraulic Top Roller Lift  
 CR100HW: Includes Hydraulic Top Roller Lift and Hydraulic Winch

Contact an Authorized Wallenstein Dealer for Pricing.



## COMMERCIAL CHIPPER ACCESSORIES



### Reversible Rotor Knife



#### 1053M303

Current Models: BXTR6438F, BXTR6438P, CR70, CR70D, CR70TD  
Previous Models: BXTR6438, CR60


\$105

#### 1019M903

Current Models: CR100, CR100H, CR100HW  
Previous Models: n/a

\$112

### Ledger Knife

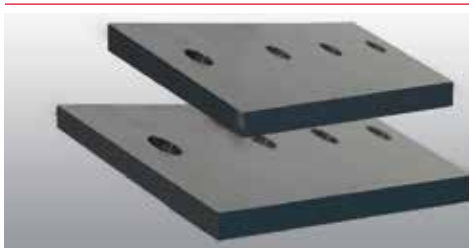

#### 1012M204

Current Models: BXTR6438F, BXTR6438P, CR70, CR70D, CR70TD  
Previous Models: BXTR6438, CR60

\$121

#### 1019M904

Current Models: CR100, CR100H, CR100HW  
Previous Models: n/a

\$135

### Ledger Knife Clearance Gauge



#### 1012L269

For use on all Chippers

\$22

### 2 5/16" Ball Hitch



#### Z91613

Current Models: BXTR6438F, BXTR6438P, CR70, CR70D, CR70TD, CR100, CR100H, CR100HW  
Previous Models: n/a

\$140







# LOG SPLITTERS

TRAILER | 3-POINT HITCH | SKIDSTEER





# TRAILER LOG SPLITTERS

## PRODUCT FEATURES

LOG SPLITTERS



### 2 Stage Hydraulic Pump (Up to 16 GPM)

Maximize your efficiency with the 2-stage pump that moves quickly and splits powerfully. Stage 1 quickly moves the wedge from the start position to the point of contact where minimal pressure is required. As the splitting action begins, the flow decreases and the pressure increases to provide maximum splitting force.

### Direct Pressure

Full splitting force is always applied because the cylinder is directly inline with the log, powering through the toughest wood with ease.



### Wide Wedge

The wide wedge splits the log using minimal distance, reducing cycle time requirements.



### Auto Return

Switched to reverse, the wedge returns to the start position hands free and then automatically clicks back to neutral.



### Honda Engine

All Wallenstein log splitters are powered by Honda engines.





### Horizontal/Vertical Splitter Orientation

Quickly switch into the vertical position to split logs too large to lift onto the splitting bed.  
(Select models, see specs for details)



### Log Shelf

All models come standard with a log shelf to help keep logs in place while splitting.



### Hydraulic Log Lift

Easily lift large blocks from the ground to the splitting bed. (WX950, WX960 & WX970)



### Safety Chains & 2" Ball Hitch



### Tires

Highway tires and steel fenders.



### Factory Installed Lights

(L Models)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



# WE200 TRAILER SPLITTERS

Economical, dependable, and powered by a Honda engine, the WE200 series log splitters are the ideal solution for home or cottage use.



POWERED by  
**HONDA**™



## WE225

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Horizontal Orientation
- 160 CC Honda GCV160 Engine
- Dimensions (LxWxH) 81" x 40" x 38"
- 342 lbs. Total Weight

- 24" Bed Height
- 9" Wedge Height
- 6.62 Second Avg. Cycle
- 13.24 Second Full Cycle

WE225  
**\$2,079**



## WE235

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Horizontal/Vertical Orientation
- 160 CC Honda GCV160 Engine
- Dimensions (LxWxH) 84" x 40" x 46"
- 397 lbs. Total Weight

- 31.5" Bed Height
- 9" Wedge Height
- 6.62 Second Avg. Cycle
- 13.24 Second Full Cycle

WE235  
**\$2,287**



# WX500 TRAILER SPLITTERS

Powerful & versatile, the WX500 series provides dependable splitting force and fast, efficient workflow for wood up to 24" long. Powered by a Honda GX engine, the WX500 series is perfect for everyday rental or cottage and property owners.



POWERED by  
**HONDA**™



## WX520

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Horizontal Orientation
- 163 CC Honda GX160 Engine
- Dimensions (LxWxH) 72" x 42" x 36"

- Dimensions (LxWxH) 72" x 42" x 45" (WX520T)
- 365 lbs. Total Weight
- 9" Wedge Height
- 6.62 Second Avg. Cycle
- 13.24 Second Full Cycle

WX520: 19" Bed Height

WX520L: 19" Bed Height, Factory Installed Lights

WX520T: 28" Bed Height

WX520	WX520L	WX520T
<b>\$2,599</b>	<b>\$2,703</b>	<b>\$2,807</b>



## WX540

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Horizontal/Vertical Orientation
- 163 CC Honda GX160 Engine
- Dimensions (LxWxH) 80" x 48" x 40"
- 470 lbs. Total Weight

WX540L: Factory Installed Lights

- 24" Bed Height
- 9" Wedge Height
- 6.62 Second Avg. Cycle
- 13.24 Second Full Cycle

WX540	WX540L
<b>\$2,911</b>	<b>\$3,015</b>



# WX900 TRAILER SPLITTERS



POWERED by  
**HONDA**™



## WX910

**25**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 25 Ton Split Force
- 4.5" Cylinder Diameter, 24" Split Opening
- Horizontal Orientation
- 270 CC Honda GX270 Engine
- Dimensions (LxWxH) 78" x 50" x 35"
- Dimensions (LxWxH) 78" x 50" x 42" (WX910T)

- 510 lbs. Total Weight
- 10" Wedge Height
- 5.24 Second Avg. Cycle
- 10.48 Second Full Cycle

WX910: 21" Bed Height  
WX910L: 21" Bed Height, Factory Installed Lights  
WX910T: 28.5" Bed Height

WX910	WX910L	WX910T
<b>\$3,592</b>	<b>\$3,657</b>	<b>\$3,769</b>



## WX920/930

**25**  
SPLITTING  
FORCE

**36"**  
SPLIT  
OPENING

**48"**  
SPLIT  
OPENING



- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• 25 Ton Split Force</li> <li>• 4.5" Cylinder Diameter</li> <li>• Horizontal Orientation</li> <li>• 270 CC Honda GX270 Engine</li> <li>• Dimensions (LxWxH) 97" x 63" x 35" (WX920)</li> </ul> | <ul style="list-style-type: none"> <li>• Dimensions (LxWxH) 121" x 63" x 35" (WX930)</li> <li>• 720 lbs. Total Weight (WX920)</li> <li>• 865 lbs. Total Weight (WX930)</li> <li>• 21" Bed Height</li> <li>• 10" Wedge Height</li> </ul> |
|---|---|

WX920: 36" Split Opening, 7.86 Second Avg. Cycle, 15.72 Second Full Cycle  
WX930: 48" Split Opening, 10.48 Second Avg. Cycle, 20.96 Second Full Cycle

WX920	WX930
<b>\$4,443</b>	<b>\$4,628</b>



Built with regular use in mind, the sturdy and dependable WX900 series offers power. Upgraded towing features make the WX900 series the right choice for firewood professionals and rental yards. With up to 48" split opening the WX900 series is also ideal for outdoor furnace applications.



POWERED by  
**HONDA**™



**WX950/  
960/970**



- 25 Ton Split Force
- 4.5" Cylinder Diameter
- Horizontal Orientation
- 270 CC Honda GX270 Engine
- Dimensions (LxWxH) 81" x 63" x 38" (WX950)
- Dimensions (LxWxH) 107" x 63" x 38" (WX960)
- Dimensions (LxWxH) 130" x 63" x 38" (WX970)
- 785 lbs. Total Weight (WX950)
- 990 lbs. Total Weight (WX960)
- 1135 lbs. Total Weight (WX970)
- 25" Bed Height
- 10" Wedge Height
- Folding Double Jockey Wheel
- Hydraulic Log Loader with 750 lb. Lift Capacity

WX950: 24" Split Opening, 5.24 Second Avg. Cycle, 10.48 Second Full Cycle

WX960: 36" Split Opening, 7.86 Second Avg. Cycle, 15.72 Second Full Cycle

WX970: 48" Split Opening, 10.48 Second Avg. Cycle, 20.96 Second Full Cycle

WX950 | WX960 | WX970  
**\$4,580 | \$5,320 | \$5,812**



**WX980**



- 31 Ton Split Force
- 5" Cylinder Diameter, 24" Split Opening
- Horizontal/Vertical Orientation
- 270 CC Honda GX270 Engine
- Dimensions (LxWxH) 80" x 50" x 42"
- 635 lbs. Total Weight
- 26" Bed Height
- 10" Wedge Height
- 6.69 Second Avg. Cycle
- 13.38 Second Full Cycle

WX980L: Factory Installed Lights

WX980 | WX980L  
**\$3,885 | \$3,950**




# WXR700 LOG SPLITTERS

## PRODUCT FEATURES



LOG SPLITTERS

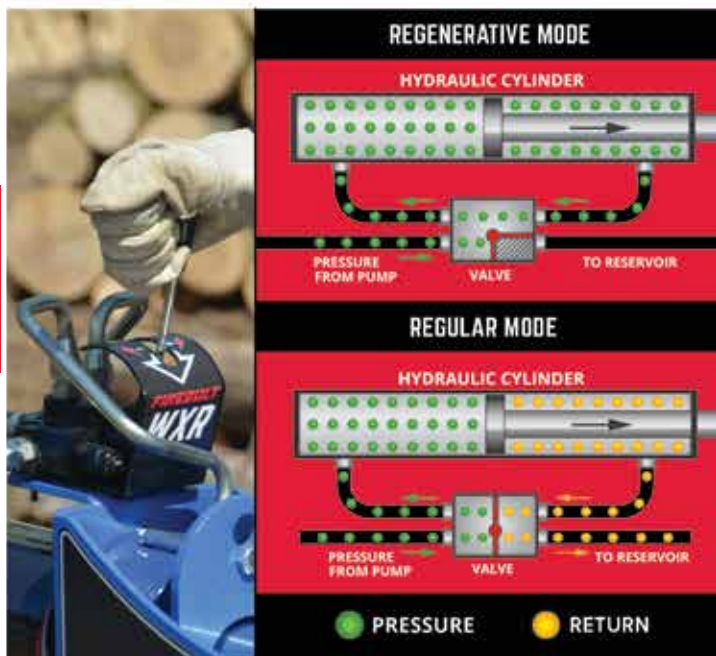

### Regenerative Valve

Valve has two modes. Push the control slightly forward to enter regenerative mode for maximum speed. When extra power is required, push control all the way forward to enter regular mode for maximum strength.

### 2 Stage Hydraulic Pump (Up to 16 GPM)

Maximize your efficiency with the 2-stage pump that moves quickly and splits powerfully. Stage 1 quickly moves the wedge from the start position to the point of contact where minimal pressure is required. As the splitting action begins, the flow decreases and the pressure increases to provide maximum splitting force.



### Wide Wedge

The wide wedge splits the log using minimal distance, reducing cycle time requirements.



### Direct Pressure

Full splitting force is always applied because the cylinder is directly inline with the log, powering through the toughest wood with ease.



### Stripper Plate

Ensures the log gets released from the wedge when the cylinder is retracted.



### Auto Return

Switched to reverse, the wedge returns to the start position hands free and then automatically clicks back to neutral.

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED



-ORA



-GRN



-BLU



-YEL



-GRY



-BLK




WXR700

TRAILER  
SPLITTERS

Compromise no more between speed or strength. The Firebolt is the first 2x2 speed log splitter, marking the next generation of log splitter that is both faster and stronger.

**FIREBOLT**  
**2x2 SPEED**

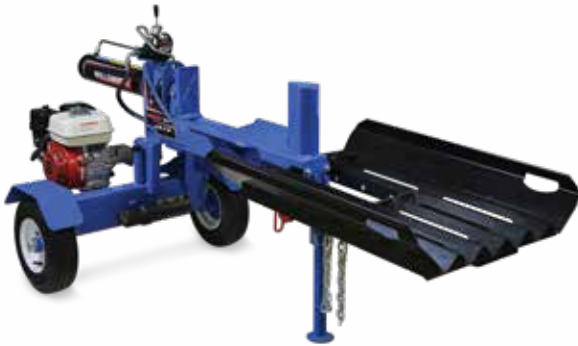**POWERED by**  
**HONDA™**


\*Shown with optional folding shelf (W4212)

WXR720



- 27 Ton Split Force
- 4.5" Cylinder Diameter, 24" Split Opening
- Horizontal Orientation
- 196 CC Honda GX200 Engine
- Dimensions (LxWxH) 76" x 40" x 44"

- 460 lbs. Total Weight
- 27" Bed Height
- 10" Wedge Height
- 5.35 Second Avg. Cycle
- 11 Second Full Cycle

WXR720L: Factory Installed Lights

WXR720 | WXR720L  
**\$3,223 | \$3,296**


\*Shown with optional clamp on shelf (W4211)

WXR740



- 27 Ton Split Force
- 4.5" Cylinder Diameter, 24" Split Opening
- Horizontal/Vertical Orientation
- 196 CC Honda GX200 Engine
- Dimensions (LxWxH) 83" x 48" x 44"

- 570 lbs. Total Weight
- 27" Bed Height
- 9" Wedge Height
- 5.35 Second Avg. Cycle
- 11 Second Full Cycle

WX740L: Factory Installed Lights

WXR740 | WXR740L  
**\$3,617 | \$3,686**



# 3-POINT HITCH LOG SPLITTERS

## PRODUCT FEATURES



### Wide Wedge

The wide wedge splits the log using minimal distance, reducing cycle time requirements.



### Direct Pressure

Full splitting force is always applied because the cylinder is directly inline with the log, powering through the toughest wood with ease.



### Auto Return

Switched to reverse, the wedge returns to the start position hands free and then automatically clicks back to neutral.



### Cat I 3-Point Hitch

iMatch & quick hitch compatible.

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL


-GRY

-BLK



# WX300 3PH SPLITTERS

Making the most of your equipment, the WX300 series is a powerful 3-point hitch log splitter that's ready to work. The WX300 series gives you the splitting force and log length you need on the farm. With up to 48" splitting length the WX300 series is ideal for outdoor furnace applications.

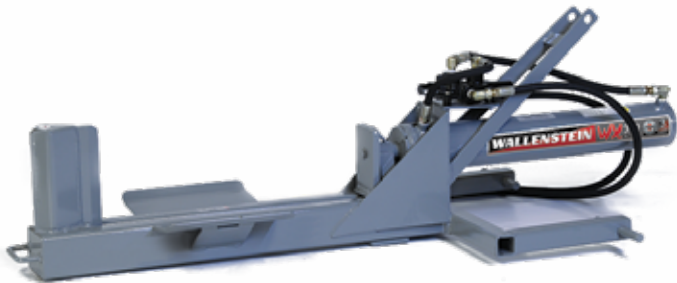

## WX310

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Horizontal Orientation
- Dimensions (LxWxH) 70" x 28" x 24"
- 220 lbs. Total Weight
- 9" Wedge Height

- 6.62 Second Avg. Cycle\*
- 13.24 Second Full Cycle\*
- \*depends on flow from tractor
- 10 gpm Recommended Minimum Hydraulic Flow

WX310C: Closed Centre Hydraulics

WX310 | WX310C  
**\$1,378 | \$1,516**

## WX320

**25**  
SPLITTING  
FORCE

**36"**  
SPLIT  
OPENING



- 25 Ton Split Force
- 4.5" Cylinder Diameter, 36" Split Opening
- Horizontal Orientation
- Dimensions (LxWxH) 96" x 30" x 24"
- 540 lbs. Total Weight
- 10" Wedge Height

- 11.43 Second Avg. Cycle\*
- 22.86 Second Full Cycle\*
- \*depends on flow from tractor
- 13 gpm Recommended Minimum Hydraulic Flow

WX320C: Closed Centre Hydraulics

WX320 | WX320C  
**\$2,460 | \$2,594**



# WX300 3PH SPLITTERS



LOG SPLITTERS



## WX330

**25**  
SPLITTING  
FORCE


**48"**  
SPLIT  
OPENING



- 25 Ton Split Force
- 4.5" Cylinder Diameter, 48" Split Opening
- Horizontal Orientation
- Dimensions (LxWxH) 120" x 30" x 24"
- 685 lbs. Total Weight
- 10" Wedge Height

WX330C: Closed Centre Hydraulics

WX330 | WX330C  
**\$2,749 | \$2,890**

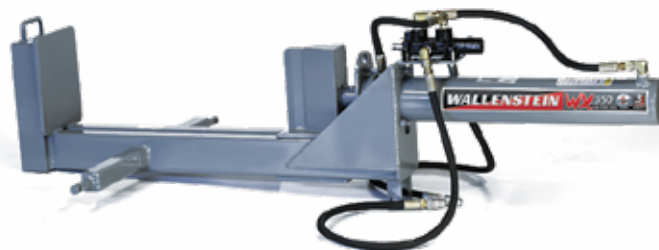

## WX350

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Vertical Orientation
- Dimensions (LxWxH) 70" x 28" x 18"
- 239 lbs. Total Weight
- 9" Wedge Height

WX350C: Closed Centre Hydraulics

WX350 | WX350C  
**\$1,378 | \$1,516**





## WX360

**31**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 31 Ton Split Force
- 5" Cylinder Diameter, 24" Split Opening
- Vertical Orientation
- Dimensions (LxWxH) 70" x 28" x 26"
- 349 lbs. Total Weight
- 10" Wedge Height
- 9.73 Second Avg. Cycle\*
- 19.47 Second Full Cycle\*
- \*depends on flow from tractor
- 16 gpm Recommended Minimum Hydraulic Flow

WX360C: Closed Centre Hydraulics

WX360 | WX360C  
**\$1,971 | \$2,113**



## WX370

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Horizontal/Vertical Orientation
- Dimensions (LxWxH) 86" x 30" x 30"
- 350 lbs. Total Weight
- 10" Wedge Height
- 6.62 Second Avg. Cycle\*
- 13.24 Second Full Cycle\*
- \*depends on flow from tractor
- 10 gpm Recommended Minimum Hydraulic Flow

WX370C: Closed Centre Hydraulics

WX370 | WX370C  
**\$1,770 | \$1,910**



# SKIDSTEER LOG SPLITTERS

## PRODUCT FEATURES



### Wide Wedge

The wide wedge splits the log using minimal distance, reducing cycle time requirements.



### Direct Pressure

Full splitting force is always applied because the cylinder is directly inline with the log, powering through the toughest wood with ease.



### Auto Return

Switched to reverse, the wedge returns to the start position hands free and then automatically clicks back to neutral. (Excludes WX410 & WX430)



### Stripper Plate

Ensures the log gets released from the wedge when the cylinder is retracted. (WX410 & WX430)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



# WX400 SKIDSTEER SPLITTERS

Powered from your skidsteer, the WX400 series are quick to split. With powerful splitting force and the ease of connecting to your skidsteer, your job will be finished in no time.



LOG SPLITTERS



\*Shown with optional 4-way wedge (W4120)



\*Shown with optional 4-way wedge (W4130)

## WX410

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Inverted Horizontal Orientation
- Dimensions (LxWxH) 66" x 36" x 22"
- 339 lbs. Total Weight
- 9" Wedge Height
- Stripper Plates

- 6.62 Second Avg. Cycle\*
- 13.24 Second Full Cycle\*
- \*depends on flow from skidsteer
- 10-18 gpm Recommended Hydraulic Flow

WX410  
**\$1,779**

## WX430

**25**  
SPLITTING  
FORCE

**36"**  
SPLIT  
OPENING



- 25 Ton Split Force
- 4.5" Cylinder Diameter, 36" Split Opening
- Inverted Horizontal Orientation
- Dimensions (LxWxH) 96" x 36" x 22"
- 585 lbs. Total Weight
- 10" Wedge Height

- Stripper Plates
- 11.43 Second Avg. Cycle\*
- 22.86 Second Full Cycle\*
- \*depends on flow from skidsteer
- 13-18 gpm Recommended Hydraulic Flow

WX430  
**\$3,080**



# WX400 SKIDSTEER SPLITTERS



LOG SPLITTERS



## WX440

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Horizontal Orientation
- Dimensions (LxWxH) 66" x 36" x 22"
- 370 lbs. Total Weight
- 9" Wedge Height

WX440

**\$1,958**



## WX450

**25**  
SPLITTING  
FORCE

**36"**  
SPLIT  
OPENING



- 25 Ton Split Force
- 4.5" Cylinder Diameter, 36" Split Opening
- Horizontal Orientation
- Dimensions (LxWxH) 90" x 36" x 22"
- 680 lbs. Total Weight
- 10" Wedge Height

WX450

**\$3,397**





## WX460

**31**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 31 Ton Split Force
- 5" Cylinder Diameter, 24" Split Opening
- Horizontal Orientation
- Dimensions (LxWxH) 66" x 36" x 24"
- 480 lbs. Total Weight
- 10" Wedge Height
- 9.73 Second Avg. Cycle\*
- 19.47 Second Full Cycle\*
- \*depends on flow from skidsteer
- 16-18 gpm Recommended Hydraulic Flow

WX460  
**\$2,694**



## WX470

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Horizontal/Vertical Orientation
- Dimensions (LxWxH) 96" x 36" x 26"
- 375 lbs. Total Weight
- 9" Wedge Height
- 6.62 Second Avg. Cycle\*
- 13.24 Second Full Cycle\*
- \*depends on flow from skidsteer
- 10-18 gpm Recommended Hydraulic Flow

WX470  
**\$2,034**



## MINI SKIDSTEER LOG SPLITTERS

### PRODUCT FEATURES



#### Wide Wedge

The wide wedge splits the log using minimal distance, reducing cycle time requirements.



#### Direct Pressure

Full splitting force is always applied because the cylinder is directly inline with the log, powering through the toughest wood with ease.



#### Stripper Plate

Ensures the log gets released from the wedge when the cylinder is retracted.



#### 2 Mounting Styles Available

Easily hook up to your mini-skidsteer. (See specs for details)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



# WX200

## MINI SKIDSTEER SPLITTERS

Powered from your mini skidsteer, the WX200 series are quick to split. With powerful splitting force and the ease of connecting to your mini skidsteer, your job will be finished in no time.



LOG SPLITTERS



### WX210

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Inverted Horizontal Orientation
- Dimensions (LxWxH) 73" x 24" x 19.5"
- 334 lbs. Total Weight
- 9" Wedge Height
- Stripper Plates
- 6.62 Second Avg. Cycle\*
- 13.24 Second Full Cycle\*
- \*depends on flow from mini skidsteer
- Mini Skidsteer Mounting Plate (Excludes Bobcat)
- 10-18 gpm Recommended Hydraulic Flow
- 23 HP Min. Recommended

WX210  
**\$ 1,679**



### WX210B

**20**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING



- 20 Ton Split Force
- 4" Cylinder Diameter, 24" Split Opening
- Inverted Horizontal Orientation
- Dimensions (LxWxH) 73" x 36" x 19.5"
- 381 lbs. Total Weight
- 9" Wedge Height
- Stripper Plates
- 6.62 Second Avg. Cycle\*
- 13.24 Second Full Cycle\*
- \*depends on flow from mini skidsteer
- Mini Skidsteer Mounting Plate (Bobcat)
- 10-18 gpm Recommended Hydraulic Flow
- 23 HP Min. Recommended

WX210B  
**\$ 1,679**



# LOG SPLITTER ACCESSORIES



## 4-Way Wedge



### W4110

Current Models: WE225, WX310, WX310C, WX520, WX520L, WX520T  
Previous Models: WE220, WX515, WX515L, WX515T

\$309



### W4120

Current Models: WE235, WX350, WX350C, WX370, WX370C, WX410, WX440, WX470, WX540, WX540L  
Previous Models: WE230, WX530, WX530L

\$309



### W4130

Current Models: WX320, WX320C, WX330, WX330C, WX360, WX360C, WX430, WX450, WX460, WX920, WX930, WX950, WX960, WX970, WX980, WX980L, WXR740, WXR740L  
Previous Models: WX630SU, WX630SUL, WX640, WX640L

\$309



### W4140

Current Models: WX910, WX910L, WX910T, WXR720, WXR720L  
Previous Models: WX615SU, WX615TSU, WX620, WX620L, WX620T, WX630SU, WX630SUL, WX640, WX640L

\$309

## Hitch Extension



### W4202

12" hitch extension for 2" ball hitch  
Required for ATV  
For use with all trailer models.

\$50

## All Weather Wood Splitter Cover



### W4204

Heavy duty industrial material, made in Canada  
Protects your splitter from harsh elements  
Current Models: WE225, WE235, WX520, WX520L, WX520T, WX540, WX540L, WXR720, WXR720L, WXR740, WXR740L  
Previous Models: WE220, WX515, WX515L, WX515T, WX530, WX530L, WX615SU, WX615TSU, WX620, WX620L, WX620T, WX630SU, WX630SUL, WX640, WX640L

\$128

## Folding Shelf



### W4212

Current Models: WX520, WX520L, WX520T, WX910, WX910L, WX910T, WX920, WX930, WXR720, WXR720L  
Previous Models: WX510, WX515, WX515L, WX515T, WX615SU, WX615TSU, WX620, WX620L, WX620T

\$518

## Clamp On Shelf




### W4211

Current Models: WX310, WX310C, WX370, WX370C, WX440, WX460, WX470, WX520, WX520L, WX520T, WX540, WX540L, WX910, WX910L, WX910T, WX980, WX980L, WXR720, WXR720L, WXR740, WXR740L  
Previous Models: WX515, WX515L, WX515T, WX530, WX530L, WX615SU, WX615SUL, WX620, WX620L, WX620T, WX630SU, WX630SUL, WX640, WX640L

\$151

## Stroke Limiter

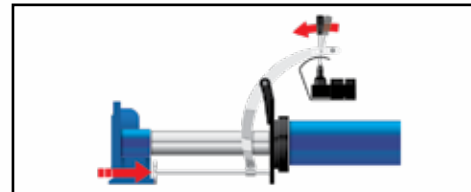

Maximize productivity when splitting shorter pieces by automatically stopping the cylinder from fully returning to the home position. This can almost cut your cycle time in half.

### W4213

Current Models: WX310, WX310C, WX320, WX320C, WX330, WX330C, WX350, WX350C, WX370, WX370C, WX470, WX520, WX520L, WX520T, WX540, WX540L, WX910, WX910L, WX910T, WX920, WX930, WXR720, WXR720L, WXR740, WXR740L  
Previous Models: WX510, WX515, WX515L, WX515T, WX530, WX530L, WX615SU, WX615TSU, WX620, WX620L, WX620T, WX630SU, WX630SUL, WX640, WX640L

\$241

### W4214

Current Models: WX360, WX360C, WX450, WX460, WX980, WX980L  
Previous Models: n/a

\$241





**ZIPCHORD**



PROCESSORS

## FIREWOOD PROCESSORS

3-POINT HITCH | TRAILER





# FIREWOOD PROCESSORS

## PRODUCT FEATURES



### HANDLE

Full-length logs up to 22" diameter using the standard hydraulic winch featuring a 50' synthetic rope and a 1550 lb. pulling capacity.



### CUT

Up to 36" in length while standing straight reducing physical strain.



### SPLIT AND STACK

Using 25 tons of splitting force without heavy lifting.



### Auto Cycle

A single action triggers the splitter and automatically returns to the home position. This allows you to forward the log and begin cutting the next piece as the splitter is operating.



### Ergonomic Controls

Controls placed higher for easier, more comfortable reach.




### Adjustable 4-way Wedge

Splits blocks into 4 pieces. Easily adjust the wedge height to accommodate different sized logs.



### Lower Angle Log Chute

Allows longer logs to sit flat on the loading ramp.

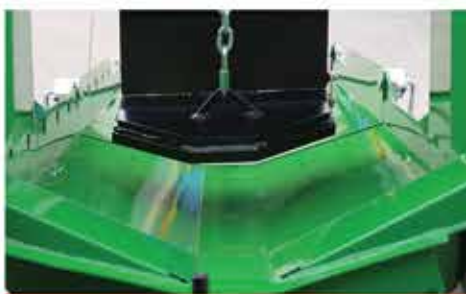

### Upper Chute Log Guide

Contoured sides and a weight hold the log in place while cutting.



### Adjustable Exit Chute

Offloads firewood up to 54" high which is ideal for trailers, wagons or bins.





### 24" or 36" Firewood

An over-sized splitter opening ensures full 24" or 36" firewood lengths. (see specs for details)



### Log Length Indicator

Adjust this guide to set your preferred log length.



### Cylinder Cover

Protects the splitting cylinder from debris or damage.



### Toolbox

A handy spot to keep tools close by.



### Adjustable Swivel Trailer Hitch

Pull the pin and swing the trailer hitch 90°. Keeps it safe from damage and allows access for pulling away from the wood pile. (WP840, WP870)



### Honda Engine

Powered by a 389 CC Honda GX390 electric start engine. (WP840, WP870)



### Torflex® Suspension

For smoother towing. (WP840, WP870)



### Highway Travel

With 2" ball hitch and full trailer lighting. (WP840, WP870)



### Highway Tires

(WP840, WP870)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



# WP200 3PH PROCESSORS

The WP200 series firewood processor transfers your tractor's hydraulic power straight into wood processing power.

## ZIPCARD



PROCESSORS



### WP240

**25**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING

- 25 Ton Split Force
- 4.5" Cylinder Diameter, 24" Split Opening
- 22" Max. Log Diameter
- 45 HP Min.
- Dimensions (LxWxH) 220" x 60" x 66"
- Dimensions (LxWxH) 126" x 60" x 79" (folded)
- 1614 lbs. Total Weight
- Auto-Cycle Valve
- Adjustable 4-Way Wedge
- 54" Discharge Chute Height
- 50' Synthetic Winch Rope
- 1550 lb. Pulling Capacity
- 60" Choker Strap Included
- Full Stroke Splitting Cycle Time Varies with Hydraulic Flow
- Cat I & II
- Requires 12-24 gpm Hydraulic Flow

WP240

**\$9,586**



### WP270

**25**  
SPLITTING  
FORCE

**36"**  
SPLIT  
OPENING

- 25 Ton Split Force
- 4.5" Cylinder Diameter, 36" Split Opening
- 22" Max. Log Diameter
- 45 HP Min.
- Dimensions (LxWxH) 244" x 60" x 66"
- Dimensions (LxWxH) 161" x 60" x 79" (folded)
- 1785 lbs. Total Weight
- Auto-Cycle Valve
- Adjustable 4-Way Wedge
- 54" Discharge Chute Height
- 50' Synthetic Winch Rope
- 1550 lb. Pulling Capacity
- 60" Choker Strap Included
- Full Stroke Splitting Cycle Time Varies with Hydraulic Flow
- Cat I & II
- Requires 12-24 gpm Hydraulic Flow

WP270

**\$11,503**



# WP800 TRAILER PROCESSORS

Built for highway travel and designed for maximum productivity, the WP800 trailer series is ideal for high volume firewood producers. When time is money, the powerful Honda engine gives these firewood processors a lightning fast cycle time.



PROCESSORS

POWERED by  
**HONDA**™



## WP840

**25**  
SPLITTING  
FORCE

**24"**  
SPLIT  
OPENING

- 25 Ton Split Force
- 4.5" Cylinder Diameter, 24" Split Opening
- 22" Max. Log Diameter
- 389 CC Honda GX390 Engine
- Dimensions (LxWxH) 220" x 60" x 66"
- Dimensions (LxWxH) 126" x 60" x 79" (folded)
- 2035 lbs. Total Weight
- Auto-Cycle Valve
- Adjustable 4-Way Wedge
- 54" Discharge Chute Height
- 50' Synthetic Winch Rope
- 1550 lb. Pulling Capacity
- 60" Choker Strap Included
- 8.3 Second Full Split Cycle
- 5.30 x 12.00 Tire Size

WP840  
**\$13,408**



## WP870

**25**  
SPLITTING  
FORCE

**36"**  
SPLIT  
OPENING

- 25 Ton Split Force
- 4.5" Cylinder Diameter, 36" Split Opening
- 22" Max. Log Diameter
- 389 CC Honda GX390 Engine
- Dimensions (LxWxH) 244" x 60" x 66"
- Dimensions (LxWxH) 161" x 60" x 79" (folded)
- 2273 lbs. Total Weight
- Auto-Cycle Valve
- Adjustable 4-Way Wedge
- 54" Discharge Chute Height
- 50' Synthetic Winch Rope
- 1550 lb. Pulling Capacity
- 60" Choker Strap Included
- 12.1 Second Full Split Cycle
- 5.30 x 12.00 Tire Size

WP870  
**\$15,337**



# FIREWOOD PROCESSOR ACCESSORIES



## 6-Way Wedge



### P601

Current Models: WP240, WP270, WP840, WP870  
Previous Models: WP235, WP265, WP635, WP835, WP865

### P600

Current Models: n/a  
Previous Models: WP230, WP260, WP630, WP830, WP860

\$783

## 48" Log Peavey



### Z99001

Use the log peavey to feed your final log into the firewood processor. Also the ideal tool for gaining leverage for rolling heavy logs into position.

\$147

## Nylon Chainsaw Holder



### P100

A handy holder to store your chainsaw when not in use. For use on all wood processors.

\$114

## Pivoting Chainsaw Holder




### P201

Easily mounts to most chainsaws. Securely holds your chainsaw in place while cutting logs. Saw can easily be detached without the use of tools. Will work with up to a maximum 30" chain bar length.

\$674

## 60" Winching Strap

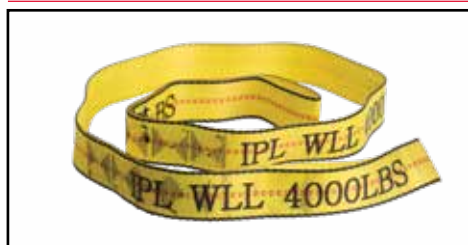

### Z92405

High strength nylon strap for winching logs onto the processor

\$27

## PTO Powerpak




### P300

For use on all WP200 models.

\$1,779

## Spare Pivoting Chainsaw Adapter

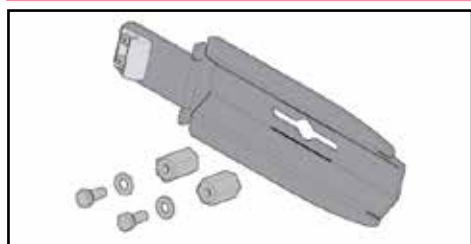

### P211

Spare adapter kit for second chainsaw. For use with P201.

\$158

## Firewood Mesh Bag and Frame



### P500


Firewood Mesh Bag Frame  
(Optimal skid size: 48" x 48")

### Z99007

Firewood Mesh Bag

\$701

## Closed Center Hydraulics

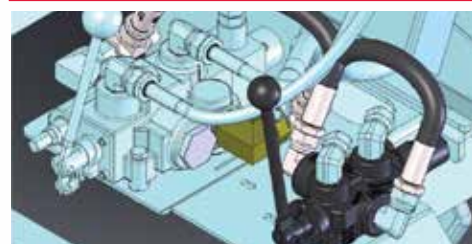

P400 Shown

### Z56919

Closed center plug for WP200 models used on tractors with closed center hydraulics.

Current Models: WP240, WP270

Previous Models: n/a

\$28

### P400

Closed center kit for WP200 models used on tractors with closed center hydraulics. (Includes valve, required hoses, and fittings)

Current Models: n/a

Previous Models: WP230, WP235, WP260, WP265

\$241







SKIDDING WINCH

## SKIDDING WINCHES & SKIDDING PLATES

3-POINT HITCH





# SKIDDING WINCHES

## PRODUCT FEATURES



### Pulling Strength

Up to 14,000 lbs. of pulling capacity.



### Reach

Reach hard to get logs up to 165' away.



### PTO Drive

Winch is powered by connecting directly to your tractor's PTO drive. (Excludes FX35)



### Removable Clutch Assembly

Easily service your winch with the removable clutch. (Excludes FX35)



### Winch Cable End

Designed so the cable will act as a choker chain. (Excludes FX35)



### Keyhole Slots

Keyhole slots provide a secure and easy hookup for choker chains. (Excludes FX35)





### Trailer Hitch

Allows you to hook onto a trailer without detaching the winch. (Excludes FX35 & FX66)



### Remote Controlled Operation

Control your winch from up to 300' (100m) away. (FX85R, FX110R, FX140R)



### Hydraulic 2-Speed Winch

(FX35)



### Choker Chains

Hook on to multiple logs with the included choker chains. (Select models, see specs for details)



### Keyhole Sliders

Pull up to 3 logs at one time using the keyhole sliders. (Excludes FX35 & FX66)



### Height Adjustable Snatch Block

Easily adjustable to maximize winching efficiency. (Excludes FX35 & FX66)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED



-ORA



-GRN



-BLU



-YEL



-GRY



-BLK



# FX

## 3PH SKIDDING WINCHES



### FX35

**3,500 LBS**  
PULLING CAPACITY

- 3,500 lb. Pulling Capacity
- 15-30 HP Range
- 2 Speed Hydraulic Winch
- 22-260 ft./min. Line Speed
- 80' of 5/16" Synthetic Rope
- Dimensions (LxWxH) 27" x 40" x 48"
- 245 lbs. Total Weight
- Cat I
- 1 Choker Chain Included
- Requires 2-12 GPM, Optimum 6 gpm

\*Synthetic winch rope requires use of chokers.

FX35  
**\$3,317**



### FX66

**6,600 LBS**  
PULLING CAPACITY

- 6,600 lb. Pulling Capacity
- 30-60 HP Range
- Mechanical Dry Disk Clutch
- 96-238 ft./min. Line Speed
- 165' of 3/8" Steel Cable
- Dimensions (LxWxH) 19" x 40" x 71"
- 450 lbs. Total Weight
- PTO Height 16.38"
- Cat I

FX66  
**\$4,048**



Managing the full potential of your forest is easy with the pulling strength of the Bush Pilot skidding winch. Reach the trees you need to cut, even on steep hills or swampland without the need for large heavy equipment. For tractors 15 - 140 HP, the Bush Pilot has a pulling capacity up to 14,000 lbs. and can reach up to 165'.



SKIDDING WINCH



## FX85

**8,500 LBS**  
PULLING CAPACITY

- 8,500 lb. Pulling Capacity
- 30-60 HP Range
- Mechanical Dry Disk Clutch
- 96-238 ft./min. Line Speed
- 165' of 3/8" Steel Cable
- Dimensions (LxWxH)  
27" x 40" x 76"
- 470 lbs. Total Weight
- PTO Height 16.38"
- Cat I
- 2 Choker Chains Included
- 2 Keyhole Sliders Included

FX85R: Remote Controlled Operation\*

\*Requires 12V and 1-2 gpm of hydraulic flow from tractor.

FX85	FX85R
<b>\$4,522</b>	<b>\$6,661</b>



## FX110

**11,000 LBS**  
PULLING CAPACITY

- 11,000 lb. Pulling Capacity
- 45-100 HP Range
- Mechanical Dry Disk Clutch
- 98-253 ft./min. Line Speed
- 165' of 7/16" Steel Cable
- Dimensions (LxWxH)  
28" x 50.5" x 79"
- 796 lbs. Total Weight
- PTO Height 20.96"
- Cat I
- 2 Choker Chains Included
- 2 Keyhole Sliders Included

FX110R: Remote Controlled Operation\*

FX110	FX110R
<b>\$5,285</b>	<b>\$7,552</b>



## FX140

**14,000 LBS**  
PULLING CAPACITY

- 14,000 lb. Pulling Capacity
- 60-140 HP Range
- Mechanical Dry Disk Clutch
- 98-246 ft./min. Line Speed
- 165' of 7/16" Steel Cable
- Dimensions (LxWxH)  
28" x 58.5" x 80"
- 898 lbs. Total Weight
- PTO Height 22.15"
- Cat II
- 2 Choker Chains Included
- 2 Keyhole Sliders Included

FX140R: Remote Controlled Operation\*

FX140	FX140R
<b>\$6,219</b>	<b>\$8,392</b>



## SKIDDING PLATE PRODUCT FEATURES



### Four Chain Holder Slots

Keep your chains organized and ready to use.



### Removable Hitch

Allows you to still use the trailer hitch without detaching the skidding plate.

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



**FXP****3PH  
SKIDDING PLATES**

Capable of handling multiple logs at one time, the FXP reduces the drag surface by lifting the front end of the logs. This gives you better control when turning, as the log acts like a trailer. The optional choker chains and logging tongs are both ideal tools for quick hookup.



SKIDDING WINCH

**FXP20**

- Up to 40 HP Range
- Dimensions (LxWxH) 35" x 12" x 32"
- 98 lbs. Total Weight
- Cat I
- 1 Saddle Grab Hook
- 2" Receiver for Ball Mount

FXP20  
**\$963**

**FXP30**

- Up to 80 HP Range
- Dimensions (LxWxH) 44" x 25" x 44"
- 216 lbs. Total Weight
- Cat I & II
- 2 Saddle Grab Hooks
- 2" Receiver for Ball Mount

FXP30  
**\$1,204**



## SKIDDING WINCH & PLATE ACCESSORIES



### Self Releasing Directional Pulley



**5089A100** \$444  
Allows you to safely winch logs around corners, reducing damage to your logs. As the log approaches the pulley, it triggers a lever that automatically releases the cable from the pulley.  
For use with all winches.

### Logging Tongs



**Z99003** \$281  
Opens to approx. 26 inches.  
Current Models: FXP20, FXP30  
Previous Models: n/a

### Synthetic Choker



**Z92125** \$129  
60" Synthetic Choker with Rod Chain End  
**Z92126** \$166  
84" Synthetic Choker with Rod Chain End

### Nylon Chainsaw Holder




**P100** \$114  
Easily bolts onto your winch for a convenient place to store your chainsaw when not in use.  
Current Models: FX66, FX85, FX85R, FX110, FX110R, FX140, FX140R  
Previous Models: n/a

### Synthetic Rope



**Z92123** \$1,175  
200 ft 7/16" Synthetic mainline with hook chain end.  
Current Models: FX66, FX85, FX85R  
Previous Models: FX65, FX65R  
**Z92124** \$1,457  
200 ft 1/2" Synthetic mainline with hook chain end.  
Current Models: FX110, FX110R, FX140, FX140R  
Previous Models: FX90, FX90R, FX120, FX120R  
\*Synthetic winch rope requires use of chokers.

### Choker Chains

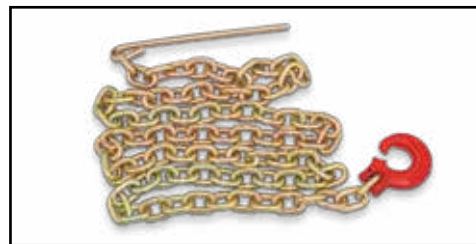

**Z92318** \$104  
90" choker chain with sliding hook







TIMBER TALON

## TRAILERS & LOG LOADERS





# TRAILERS & LOG LOADERS

## PRODUCT FEATURES



**LX95 Models**



**LX115 Models**



### Walking Beam Axle

Smoothly travel over uneven terrain.



### Sliding Axle

Ideal for ATV users, the sliding axle allows the trailer weight to be shifted towards the tongue for better traction or remain balanced over the axle. (LT30 Models)



### Surge Brakes

The hydraulic brakes automatically engage if the trailer begins to surge forward, such as traveling downhill or slowing. (LT30A, LT30H, LT30HA)



### Electric Brakes

Full size electric drum brakes. (LT60H)



### Self Centering Bunk Posts

If bumped, the log posts naturally return to their proper position.



### Full Trailer Lighting

(LT30H, LT30HA & LT60H)





### Tires

Off Road (LT30, LT30A, LT60)  
Highway (LT30H, LT30HA, LT60H)



### Clevis Hitch

(LT30, LT30A & LT60)



### Ball Hitch

(LT30H, LT30HA & LT60H)



### 5 Stick Swivel Controls

Allow you to operate the boom from either side of the trailer.



### 360° Hydraulic Rotator

Pick up logs in any position and orient them exactly where you want.



### Bypass Grapple

Grapple tines interlace as tight as 3", ensuring easy handling of smaller logs and branches.



### 270° Boom Swing Range

Gives you full access to both sides of the trailer while providing an operator safety zone.



### Hydraulic Stabilizers

Create a wider base for greater stability.



### Hydraulic 2-Speed Winch

Complete with an 80' synthetic rope.  
(LW95W, LW95PW & LX115W)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



# LT30 LOG TRAILERS

Suitable for compact tractors, ATVs, and UTVs, the LT30 series log trailer hauls logs wherever you need. Expand the versatility of your trailer with the optional flat bed or dump box.



TIMBER TALON



## LT30 OFF ROAD TRAILER

- 5000 lb. Load Capacity
- 30 HP Min. Tractor Size
- 600 CC Min. ATV/UTV Size
- 96" Trailer Bed Length
- 14" Ground Clearance
- Dimensions (LxWxH) 161" x 64" x 58"
- 892 lbs. Total Weight
- 27 x 10.5 x 15 - 8 Ply Tires
- Clevis Hitch
- 8 Removable Self-centering Bunk Posts
- Walking Beam Axles
- 4 Position Manual Sliding Axle
- Standard Mounting for LX95 Series Grapples

LT30A: Hydraulic Sliding Axle, Surge Brakes (Recommended for ATV/UTV use)

LT30	LT30A
<b>\$6,624</b>	<b>\$8,790</b>



## LT30H HIGHWAY TRAILER

- 5000 lb. Load Capacity
- 30 HP Min. Tractor Size
- 600 CC Min. ATV/UTV Size
- 96" Trailer Bed Length
- 14" Ground Clearance
- Dimensions (LxWxH) 161" x 64" x 58"
- 892 lbs. Total Weight
- ST205-75R14 LRC Tires
- Full Trailer Lighting
- 2" Ball Hitch
- Surge Brakes (Recommended for ATV/UTV use)
- 8 Removable Self-centering Bunk Posts
- Walking Beam Axles
- 4 Position Manual Sliding Axle
- Standard Mounting for LX95 Series Grapples

LT30HA: Hydraulic Sliding Axle

LT30H	LT30HA
<b>\$7,990</b>	<b>\$8,990</b>



# LX95 LOG LOADERS

Big on lift capacity and reach, the LX95 series log loader picks and places logs wherever you need. Expand your log loader's versatility with the optional backhoe or auger kits.



## LX95 LOG LOADER

- 800 lb. Lift Capacity
- 3-30" Grapple Opening
- 9' 6" Reach
- 12' 11" Vertical Reach (Ground to Closed Grapple)
- 7'5" Stabilizer Width
- 360° Grapple Rotation
- 270° Boom Rotation
- 733 lbs. Total Weight
- Requires Min. 1-2 gpm Hydraulic Flow

LX95P: Includes Valve to Operate Hydraulic Sliding Axle on LT30A and LT30HA

LX95	LX95P
<b>\$8,313</b>	<b>\$8,313</b>

## LX95W LOG LOADER WITH WINCH

- 800 lb. Lift Capacity
- 3-30" Grapple Opening
- 9' 6" Reach
- 12' 11" Vertical Reach (Ground to Closed Grapple)
- Hydraulic 2-Speed Winch with 80' Synthetic Rope\*
- Includes Choker Chain
- 7' 5" Stabilizer Width
- 360° Grapple Rotation
- 270° Boom Rotation
- 854 lbs. Total Weight
- Requires Min. 1-2 gpm Hydraulic

\*Synthetic winch rope requires use of chokers.

LX95PW: Includes Valve to Operate Hydraulic Sliding Axle on LT30A and LT30HA

LX95W	LX95PW
<b>\$10,423</b>	<b>\$10,635</b>



# LT60 LOG TRAILERS

Suitable for tractors and full size pickup trucks, the LT60 series log trailer hauls logs wherever you need. Expand the versatility of your trailer with the optional flat bed or dump box.



TIMBER TALON



## LT60 OFF ROAD TRAILER

- 10,000 lb. Load Capacity
- 45 HP Min. Tractor Size
- Full Size 1/2 Ton Min. Truck Size
- 132" Trailer Bed Length
- 17" Ground Clearance
- Dimensions (LxWxH) 198" x 68" x 60"
- 1340 lbs. Total Weight
- 11L15 x 15 x 8 - 12 Ply Tires
- Clevis Hitch
- 8 Removable Self-centering Bunk Posts
- Walking Beam Axles
- Standard Mounting for LX115 Series Grapples

LT60  
**\$8,528**

## LT60H HIGHWAY TRAILER

- 11,500 lb. Load Capacity
- 45 HP Min. Tractor Size
- Full Size 1/2 Ton Min. Truck Size
- 132" Trailer Bed Length
- 17" Ground Clearance
- Dimensions (LxWxH) 198" x 68" x 60"
- 1340 lbs. Total Weight
- ST235-80R16 LRE Tires
- Full Trailer Lighting
- 4 Wheel Electric Brakes
- 2-5/16" Ball Hitch
- 8 Removable Self-centering Bunk Posts
- Walking Beam Axles
- Standard Mounting for LX115 Series Grapples

LT60H  
**\$9,138**



# LX115 LOG LOADERS

Big on lift capacity and reach, the LX115 series log loader picks and places logs wherever you need. Expand your log loader's versatility with the optional backhoe or auger kits.



## LX115 LOG LOADER

- 1200 lb. Lift Capacity
- 3-40" Grapple Opening
- 11' 6" Reach
- 15' 5" Vertical Reach (Ground to Closed Grapple)
- 8' 11" Stabilizer Width
- 360° Grapple Rotation
- 270° Boom Rotation
- 1016 lbs. Total Weight
- Requires Min. 4-6 gpm Hydraulic Flow

LX115  
**\$13,326**

## LX115W LOG LOADER WITH WINCH

- 1200 lb. Lift Capacity
- 3-40" Grapple Opening
- 11' 6" Reach
- 15' 5" Vertical Reach (Ground to Closed Grapple)
- Hydraulic 2-Speed Winch with 80' Synthetic Rope\*
- Includes Choker Chain
- 8' 11" Stabilizer Width
- 360° Grapple Rotation
- 270° Boom Rotation
- 1129 lbs. Total Weight
- Requires Min. 4-6 gpm Hydraulic Flow

\*Synthetic winch rope requires use of chokers.

LX115W  
**\$15,437**



# HOW TO CONFIGURE AND PRICE YOUR TRAILER & LOG LOADER PACKAGE

## STEP 1 CHOOSE A TRAILER

**Compact Tractor (Min. 30 HP) or ATV/UTV (Min. 600 CC)**



**Offroad Tires**

**LT30**

**\$6,624**



**Highway Tires**

**LT30H**

**\$7,990**

**Hydraulic Sliding Axle Models (recommended for ATV/UTV use)**



**Offroad Tires**

**LT30A**

**\$8,790**



**Highway Tires**

**LT30HA**

**\$8,990**

**Tractor (Min. 45 HP) or Full Size Pickup Truck**



**Offroad Tires**

**LT60**

**\$8,528**



**Highway Tires**

**LT60H**

**\$9,138**

## STEP 2 CHOOSE



**Standard Log Loader**

**LX95**

**\$8,313**



**Standard Log Loader**

**LX95P**

**\$8,313**

Includes Valve to Operate Hydraulic Sliding Axle on LT30A and LT30HA



**Standard Log Loader**

**LX115**

**\$13,326**





## A LOG LOADER

## STEP 3 CHOOSE A POWER SOURCE



**Log Loader with Winch**

**LX95W**  
**\$10,423**



**Tractor Hydraulic Kit**

**L101**  
**\$588**  
(includes flow divider, connections and hoses)



**Honda Powerpack**

**L301**  
**\$1,749**  
196 CC Honda GX200 Engine



**Log Loader with Winch**

**LX95PW**  
**\$10,635**  
Includes Valve to Operate Hydraulic Sliding Axle on LT30A and LT30HA



**Tractor Hydraulic Kit**

**L101**  
**\$588**  
(includes flow divider, connections and hoses)




**Honda Powerpack**

**L301**  
**\$1,749**  
196 CC Honda GX200 Engine



**Log Loader with Winch**

**LX115W**  
**\$15,437**



**Tractor Hydraulic Kit**

**L101**  
**\$588**  
(includes flow divider, connections and hoses)



**Honda Powerpack**

**L601**  
**\$2,163**  
270 CC Honda GX270 Engine



## TRAILER & LOG LOADER ACCESSORIES



### Dump Box



- L310** \$1,614  
For use on all LT30 models. (Requires log loader to operate)
- L620** \$1,966  
For use on all LT60 models. (Requires log loader to operate)

### Backhoe Kit



- BA201** \$642  
Includes linkage, cylinder, hosing, and pins. (buckets sold separately)  
For use on all LX95 & LX115 models.

### Buckets



- BK2609** \$461  
9" Bucket, 3 Teeth
- BK2615** \$546  
15" Bucket, 4 Teeth
- BK2612** \$518  
12" Bucket, 3 Teeth
- BK2618** \$566  
18" Bucket, 4 Teeth

### Hydraulic Articulating Tongue Kit



- L650** \$925  
For use on all LT60 models.

### Expanded Metal Flat Bed



- L330** \$2,104  
For use on all LT30 models.
- L630** \$2,568  
For use on all LT60 models.

### Auger Kit




- LA610** \$525  
6" Diameter Auger Kit (auger bit included)  
For use on all LX95 & LX115 models.
- LA910** \$701  
9" Diameter Auger Kit (auger bit included)  
For use on all LX95 & LX115 models.

### 3PH Mount



- L400** \$1,848  
Includes Cat II Mount and L101 Tractor Hydraulic Kit.  
40 HP Min. for LX95 Models  
60 HP Min. for LX115 Models  
Current Models: LX95, LX95W, LX115, LX115W  
Previous Models: n/a

### Tractor Hydraulic Kit

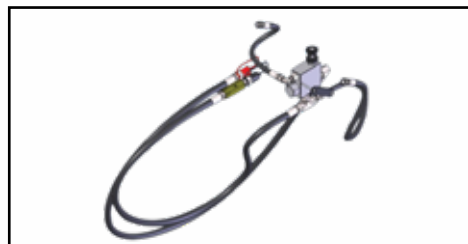

- L101** \$588  
Includes Flow Divider, Connections, and Hoses.

### Honda Powerpack



- L301** \$1,749  
196 CC Honda GX200 Engine. For use with all LX95 Models.
- L601** \$2,163  
270 CC Honda GX270 Engine. For use with all LX115 Models.

### Self-Releasing Directional Pulley



- 5089A100** \$444  
Allows you to safely winch logs around corners, reducing damage to your logs. As the log approaches the pulley, it triggers a lever that automatically releases the cable from the pulley.  
Current Models: LX95W, LX95PW, LX115W  
Previous Models: n/a

### 2 1/2" Pintle Hitch



- L640** \$409  
For use on all LT60 Models.





## LOG GRAPPLES

3-POINT HITCH | SKIDSTEER | MINI SKIDSTEER



LOG GRAPPLES





# LOG GRAPPLES

## PRODUCT FEATURES



### Bypass Grapple

Grapple tines interlace as tight as 3", ensuring easy handling of smaller logs and branches.



### AR400 Steel Grapple Tines

The grapple tines are built with hard, high strength AR400 steel. (Excludes LXG210 Models)



### Spring-centered Grapple with Locking Positions

The grapple rotates when turning corners but stays straight when grabbing logs. Includes lateral and in-line lock positions. (S Models)



### 360° Hydraulic Rotator

Pick up logs in any position and orient them exactly where you want. (R & RP Models)



### Symmetric Link Grapple

Lifts the load vertically as the grapple closes preventing the load from shifting. (Excludes LXG210 Models)



### Greaseless Bushings

Designed for low maintenance and high reliability. (Excludes LXG210 Models)





### Extendable Boom

The 24" extendable boom allows your grapple to reach logs off-trail or between stumps. (RP Models)




### Push Bar

Made with AR400 steel, applies pressure against the tree allowing operators to safely guide the tree as it falls. (LXG330 and LXG430 Models)



### Cantilever Cradle

Leverage and secure your load with the serrated cradle when lifting logs in-line. (LXG400 and LXG200 Models)

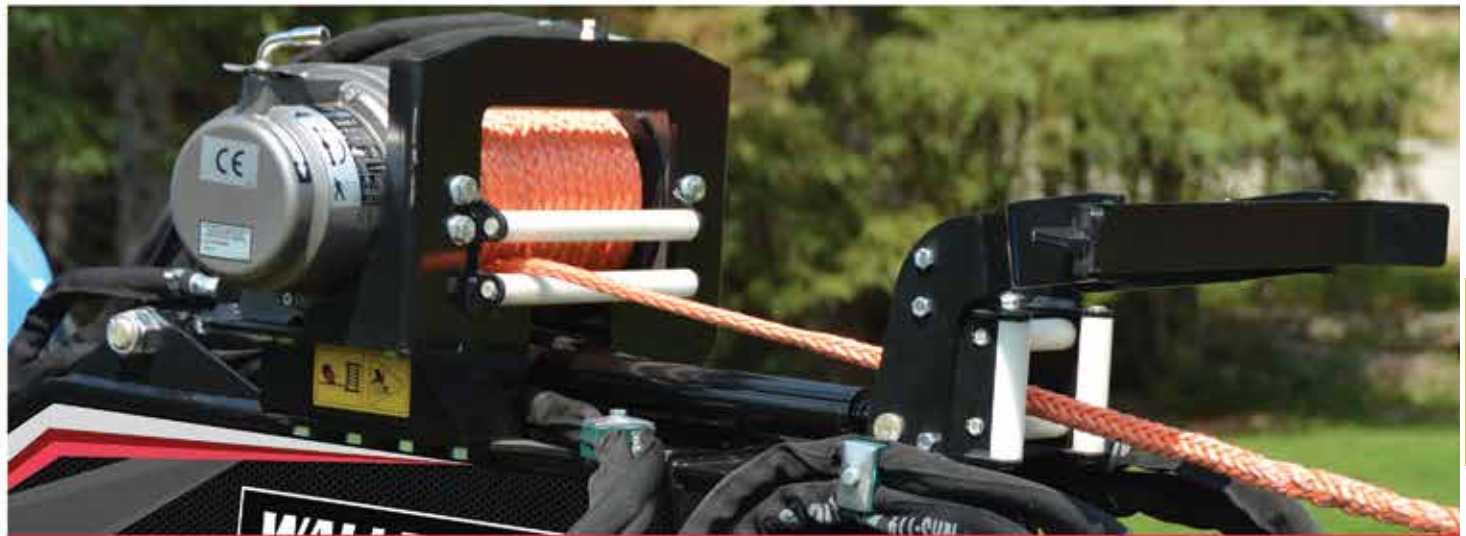

### 9,000 lb Warn Winch

Keep your tractor on-trail and retrieve logs deep in the woodlot with available Warn Winch. (RP Models)

### 100' Synthetic Rope

Haul logs safely out of the woods with 100' of non-coiling synthetic rope. (RP Models)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



# LXG300

## 3PH LOG GRAPPLES



### SPRING CENTERED SERIES



#### LXG320S

**48"**

- 3" - 48" Grapple Opening
- 3000 lb. Lift Capacity
- 20-60 HP Range
- 9400 lb. Clamp Force
- Dimensions (LxWxH) 51" x 52" x 43"
- 350 lbs. Total Weight
- 180° Lockable Spring Return
- Cat I
- Requires Min. 5-10 gpm Hydraulic Flow

LXG320S  
**\$3,327**



#### LXG330S

**72"**

- 3" - 72" Grapple Opening
- 4500 lb. Lift Capacity
- 60-180 HP Range
- 21000 lb. Clamp Force
- Dimensions (LxWxH) 70" x 76" x 56"
- 836 lbs. Total Weight
- 180° Lockable Spring Return
- Cat II & III
- Requires Min. 5-10 gpm Hydraulic Flow

LXG330S  
**\$7,903**



Fast forward your logging productivity with Wallenstein's 3-point hitch log grapple. Engineered to withstand the toughest forest conditions, these grapples are perfect partners for farmers, rural property owners, and logging contractors to forward logs out of the woods with confidence.



## HYDRAULIC ROTATOR SERIES

## PROFESSIONAL SERIES



### LXG320R

48"

- 3" - 48" Grapple Opening
- 3000 lb. Lift Capacity
- 25-65 HP Range
- 9400 lb. Clamp Force
- Dimensions (LxWxH)  
51" x 52" x 46"
- 353 lbs. Total Weight
- 360° Continuous Hydraulic Rotator
- Cat I
- Requires Min. 5-10 gpm Hydraulic Flow
- Requires 2 Sets of Remotes

LXG320R

**\$4,367**



### LXG330R

72"

- 3" - 72" Grapple Opening
- 4500 lb. Lift Capacity
- 60-180 HP Range
- 21000 lb. Clamp Force
- Dimensions (LxWxH)  
68" x 76" x 67"
- 888 lbs. Total Weight
- 360° Continuous Hydraulic Rotator
- Cat II & III
- Requires Min. 5-10 gpm Hydraulic Flow
- Requires 2 Sets of Remotes

LXG330R

**\$9,359**



### LXG330RP

72"

- 3" - 72" Grapple Opening
- 4500 lb. Lift Capacity (Retracted)
- 3000 lb. Lift Capacity (Extended)
- 60-180 HP Range
- Warn Winch
- Extendable Boom
- 21000 lb. Clamp Force
- Dimensions (LxWxH)  
68" x 76" x 70"
- 1229 lbs. Total Weight
- 360° Continuous Hydraulic Rotator
- Cat II & III
- Requires Min. 10-20 gpm Hydraulic Flow
- Requires 12V

LXG330RP

**\$14,767**

Wallenstein uses Pioneer style ball type hydraulic couplings for all tractor auxiliary connections. Substitutions are not available from Wallenstein and must be made at the customers expense. Wallenstein equipment is designed for open center hydraulic circuit hookup. All prices are MSRP and subject to applicable taxes. Prices, availability and specifications are subject to change without notice. Products may not be exactly as shown.



# LXG400

## SKIDSTEER LOG GRAPPLES



### SPRING CENTERED SERIES



#### LXG420S

**(48")**

- 3" - 48" Grapple Opening
- 3000 lb. Lift Capacity
- 30-70 HP Range
- 9400 lb. Clamp Force
- Dimensions (LxWxH) 51" x 52" x 44"
- 560 lbs. Total Weight
- 180° Lockable Spring Return
- Universal Skidsteer Mounting Plate
- Requires Min. 5-10 gpm Hydraulic Flow

LXG420S  
**\$4,159**



#### LXG430S

**(72")**

- 3" - 72" Grapple Opening
- 4500 lb. Lift Capacity
- 70-100 HP Range
- 21000 lb. Clamp Force
- Dimensions (LxWxH) 69" x 76" x 53"
- 1050 lbs. Total Weight
- 180° Lockable Spring Return
- Universal Skidsteer Mounting Plate
- Requires Min. 5-10 gpm Hydraulic Flow

LXG430S  
**\$8,631**



When you need to load, transport and stack logs smoothly and quickly at the sawmill, look no further than Wallenstein's skidsteer log grapples. Mounted to your skidsteer, these heavy-duty grapples give you total control from inside the cab to pick up and move logs with incredible agility.



## HYDRAULIC ROTATOR SERIES

## PROFESSIONAL SERIES



### LXG420R

**(48")**

- 3" - 48" Grapple Opening
- 3000 lb. Lift Capacity
- 30-70 HP Range
- 9400 lb. Clamp Force
- Dimensions (LxWxH)  
51" x 52" x 47"
- 588 lbs. Total Weight
- 360° Continuous Hydraulic Rotator
- Universal Skidsteer Mounting Plate
- Requires Min. 5-10 gpm Hydraulic Flow
- Requires 12V

LXG420R  
**\$6,239**



### LXG430R

**(72")**

- 3" - 72" Grapple Opening
- 4500 lb. Lift Capacity
- 70-100 HP Range
- 21000 lb. Clamp Force
- Dimensions (LxWxH)  
67" x 76" x 67"
- 1124 lbs. Total Weight
- 360° Continuous Hydraulic Rotator
- Universal Skidsteer Mounting Plate
- Requires Min. 5-10 gpm Hydraulic Flow
- Requires 12V

LXG430R  
**\$10,379**



### LXG430RP

**(72")**

- 3" - 72" Grapple Opening
- 4500 lb. Lift Capacity (Retracted)
- 3000 lb. Lift Capacity (Extended)
- 70-100 HP Range
- Warn Winch
- Extendable Boom
- 21000 lb. Clamp Force
- Dimensions (LxWxH)  
67" x 76" x 70"
- 1444 lbs. Total Weight
- 360° Continuous Hydraulic Rotator
- Universal Skidsteer Mounting Plate
- Requires Min. 10-20 gpm Hydraulic Flow
- Requires 12V

LXG430RP  
**\$16,307**



# LXG200

## MINI SKIDSTEER LOG GRAPPLES

Squeeze into tight spaces and get the job done efficiently with Wallenstein's new mini skidsteer log grapple. The ideal attachment for landscapers and tree service contractors who need hauling strength through narrow passages.



## SPRING CENTERED SERIES



### LXG210S



- 3" - 40" Grapple Opening
- 1000 lb. Lift Capacity
- 20-40 HP Range
- 9400 lb. Clamp Force
- Dimensions (LxWxH) 47" x 44" x 40"
- 285 lbs. Total Weight
- 180° Lockable Spring Return
- Mini Skidsteer Mounting Plate (Excludes Bobcat)
- Requires Min. 4-10 gpm Hydraulic Flow

LXG210S  
**\$2,969**



### LXG210SB



- 3" - 40" Grapple Opening
- 1000 lb. Lift Capacity
- 20-40 HP Range
- 9400 lb. Clamp Force
- Dimensions (LxWxH) 47" x 44" x 40"
- 343 lbs. Total Weight
- 180° Lockable Spring Return
- Mini Skidsteer Mounting Plate (Bobcat)
- Requires Min. 4-10 gpm Hydraulic Flow

LXG210SB  
**\$2,969**





# MANURE SPREADERS

GROUND DRIVE | PTO DRIVE





# MANURE SPREADERS

## PRODUCT FEATURES



### Heavy Duty Apron Chain

Built strong to handle full loads.

### Poly Floor Boards

Easy to clean tongue-and groove poly floor boards will not rust or rot.




### Beater Paddles

The paddle design rips and shreds evenly delivering a finer spread.



### Apron Chain Speed Adjust

Neutral, slow, medium or fast gives you the control to spread in a manner that suits your acreage.

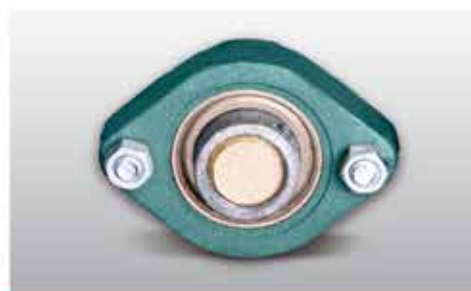

### Heavy Duty Bearings

Standard for smooth operation and longer life.



• Frame mounted  
Beater supports

• Reinforced Axle  
mounts

• Tongue load  
shared by frame

### Chassis/Frame

The trailer tongue, axle assembly and beaters rely on the rigidity of the frame which prevents the box from premature wearing and cracking.





### Apron Chain Tensioner

Easily adjust tension to keep chains aligned, run smoothly, and increase chain life.



### Powder Coated Paint

Provides extra strength and durability against the highly corrosive nature of manure.



### Replaceable Paddles

Bottom feeder only. (MX130 Models)



### Beater Speed Control

Low, off, high, clean out. (MX130 Models)



### One Piece Cor-Ten Box Side

High corrosion resistance. (MX130 Models)



### Hydraulic Hose Keeper

Stores hose ends when not in use. (MX130 Models)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



# MX

## GROUND DRIVE MANURE SPREADERS

Ground drive MX spreaders offer simplicity and reliability for equipment that does not have a PTO. Perfect for ATVs, UTVs, or even lawn tractors.



### MX25

- 25 Bushel Heaped Capacity (31.25 cu. ft.)
- 15-25 HP Range
- Ground Drive
- Box Dimensions (LxWxH) 72" x 26" x 15"
- Dimensions (LxWxH) 117" x 48" x 29"
- 510 lbs. Total Weight
- 34 lbs. Tongue Weight
- 6 x 12 Tires
- 8 Beater Paddles

MX25  
**\$3,872**

### MX50G

- 50 Bushel Heaped Capacity (62.5 cu. ft.)
- 15-30 HP Range
- Ground Drive
- Box Dimensions (LxWxH) 89" x 32" x 17"
- Dimensions (LxWxH) 156" x 57" x 35.5"
- 795 lbs. Total Weight
- 50 lbs. Tongue Weight
- 7.6 x 15 Tires
- 10 Beater Paddles

MX50G  
**\$5,735**

### MX80G

- 80 Bushel Heaped Capacity (100 cu. ft.)
- 20-45 HP Range
- Ground Drive
- Box Dimensions (LxWxH) 102" x 38" x 20"
- Dimensions (LxWxH) 168" x 63" x 37"
- 920 lbs. Total Weight
- 56 lbs. Tongue Weight
- 7.6 x 15 Tires
- 10 Beater Paddles

MX80G  
**\$6,284**



# MX PTO DRIVE MANURE SPREADERS

PTO drive MX spreaders offer increased power and spreading consistency.



## MX50P

- 50 Bushel Heaped Capacity (62.5 cu. ft.)
- 18-30 HP Range
- PTO Drive
- Box Dimensions (LxWxH) 89" x 32" x 17"
- Dimensions (LxWxH) 156" x 57" x 35.5"
- 795 lbs. Total Weight
- 50 lbs. Tongue Weight
- 7.6 x 15 Tires
- 10 Beater Paddles

MX50P

**\$5,735**



## MX80P

- 80 Bushel Heaped Capacity (100 cu. ft.)
- 25-45 HP Range
- PTO Drive
- Box Dimensions (LxWxH) 102" x 38" x 20"
- Dimensions (LxWxH) 168" x 63" x 37"
- 920 lbs. Total Weight
- 56 lbs. Tongue Weight
- 7.6 x 15 Tires
- 10 Beater Paddles

MX80P

**\$6,284**



## MX130

- 130 Bushel Heaped Capacity (162.5 cu. ft.)
- 45-75 HP Range
- PTO Drive
- Box Dimensions (LxWxH) 130" x 48" x 23"
- Dimensions (LxWxH) 214" x 79" x 42"
- Dimensions (LxWxH) 214" x 90" x 48" (MX130T)
- 2180 lbs. Total Weight
- 2500 lbs. Total Weight (MX130T)
- 330 lbs. Tongue Weight
- 10 Replaceable Beater Paddles

130T Model features large diameter retread tire designed for bigger tractors and smoother towing/spreading. Low cost replacement using retreads

MX130: 11L-15SL Tires

MX130T: 11R22.5 Retread Tires

MX130

**\$14,039**

MX130T

**\$14,039**



# MANURE SPREADER ACCESSORIES



## Flat Bottom Jack Stand



### Z91513

Current Models: MX25  
Previous Models: n/a

\$90

## Fines Pans



### M7550

Current Models: MX25  
Previous Models: n/a

\$350

## End Gates



### M7570

Current Models: MX50G (s/n B07920001 and up), MX50P  
Previous Models: n/a

\$613

## Upper Beater

Dealer Installed



### M7640

Current Models: MX130, MX130T  
Previous Models: n/a

\$1,288

### M7610

Current Models: MX50G (s/n B07920001 and up), MX50P  
Previous Models: n/a

\$396

### M7590

Current Models: MX80G (s/n A0596023 and up), MX80P (s/n A0597011 and up)  
Previous Models: n/a

\$410

### M7620 (Dealer Installed)

Hydraulically controlled. Requires 1-3 gpm. Hoses included.  
Current Models: MX130, MX130T  
Previous Models: n/a

\$647

### M7580

Current Models: MX80G (s/n A0596023 and up), MX80P (s/n A0597011 and up)  
Previous Models: n/a

\$658

### M7630 (Dealer Installed)

Hydraulically controlled. Requires 1-3 gpm. Hoses included.  
Current Models: MX130, MX130T  
Previous Models: n/a

\$1,601





**RANCHHO**



## BACKHOES

TRACTOR | SKIDSTEER | MINI SKIDSTEER





# GE COMPACT BACKHOES

## PRODUCT FEATURES



### Designed for Sub Compact Tractors


Ideal for landscapers and rural property owners.



4-point mount shown

### Subframe Mount

Properly and safely distributes the stress produced by a backhoe attachment. For a list of available subframe mounts visit [wallensteinequipment.com](http://wallensteinequipment.com).

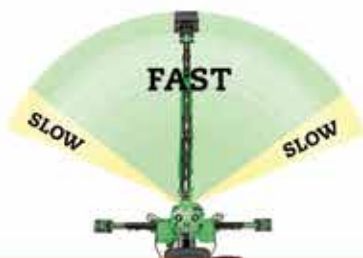

### Swing Cushioning

When swinging the boom, a cushioning hydraulic cylinder reduces the shake by slowing the boom as it reaches the furthest end of the swing range.



### Curved Boom

Protects backhoe from unnecessary damage while preventing ground from falling back into the hole.




### Hydraulic Stabilizers with Flip Over Cleats

Keep your backhoe sturdy while digging. Features both a flat base for hard surfaces and a flip over cleat base for extra grip on soft ground.



### 150° Swing Arc

A single cylinder provides strong, consistent movement throughout the entire swing range.

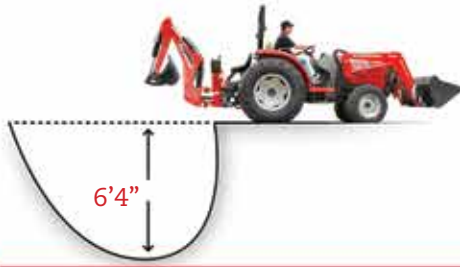

### Digging Depth

6'4" with a 2' flat bottom.



### Greasable Pins

Maintenance is easy with greasable pins on all pivot points.

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



**GE****COMPACT  
BACKHOES**

Designed for sub compact tractors 18 - 28 HP, the GE series is the ideal backhoe attachment for landscapers and rural property owners. Small but mighty, the GE series is able to dig holes and trenches over 6 feet deep.

**RANCHHO****GE605**

- 6'4" Digging Depth
- 100" Reach from Post Swing
- 18-28 HP Range (Tractor)
- 180° Bucket Rotation
- 150° Swing Arc
- 8.5" Ground Clearance
- 500 lbs. Total Weight
- Requires 3.5-6 gpm Hydraulic Flow

GE605

**\$6,195**

Price does not include mounting kit, bucket or seat.





# GX COMPACT BACKHOES


## PRODUCT FEATURES



4-point mount shown

### Subframe Mounting

Properly and safely distributes the stress produced by a backhoe attachment. For a list of available subframe mounts visit [wallensteinequipment.com](http://wallensteinequipment.com).

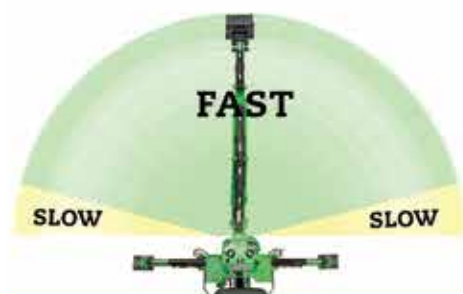

### Swing Cushioning

When swinging the boom, cushioning hydraulic cylinders reduce shake by slowing the boom as it reaches the furthest end of the swing range.



### Curved Boom

Protects backhoe from unnecessary damage while preventing ground from falling back into the hole.




### Hydraulic Stabilizers

Keep your backhoe sturdy while digging.



### 180° Swing Arc

Dual cylinders provide strong, consistent movement throughout the entire swing range.

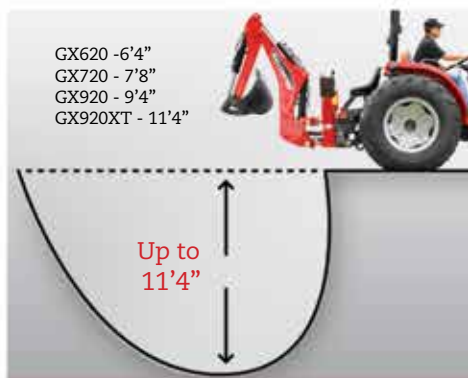

### Digging Deep

Up to 11'4" with a 2' flat bottom.



### Greaseable Pins


Maintenance is easy with greaseable pins on all pivot points.





### 3-Point Hitch Mount

Turn your tractor into a backhoe with the simple 3-point hitch mount. The 3-point hitch also utilizes your tractor's draw bar for increased rigidity.

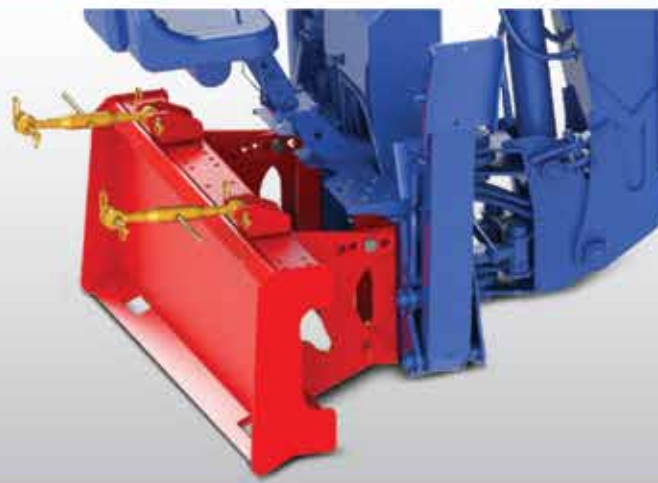

### Skidsteer & Mini Skidsteer Mount

The universal skidsteer and mini skidsteer mounts connect easily to most skidsteers. The model specific tieback kit properly and safely distributes the stress produced by a backhoe attachment. For a list of available tieback kits visit [wallensteinequipment.com](http://wallensteinequipment.com).



### Bushings

To reduce wear, hardened steel bushings are installed on all the main pivot points. (GX720, GX920 & GX920XT)



## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED

-ORA

-GRN

-BLU

-YEL

-GRY

-BLK



**GX**
**COMPACT  
BACKHOES**


## GX620

- 6'4" Digging Depth
- 100" Reach from Post Swing
- 18-28 HP Range (Tractor)
- 20-48 HP Range (Mini Skidsteer)
- 180° Bucket Rotation
- 180° Swing Arc
- 10.5" Ground Clearance
- 575 lbs. Total Weight
- Requires 5-7 gpm Hydraulic Flow

GX620

**\$7,346** Price does not include mounting kit or bucket.


## GX720

- 7'8" Digging Depth
- 123" Reach from Post Swing
- 30-60 HP Range (Tractor)
- 30-60 HP Range (Skidsteer)
- 180° Bucket Rotation
- 180° Swing Arc
- 10.5" Ground Clearance
- 765 lbs. Total Weight
- Requires Min. 5 gpm Hydraulic Flow

GX720

**\$8,478** Price does not include mounting kit or bucket.



Get the most out of your land and your tractor with the GX series compact backhoe. Landscaping, excavating and trenching soon become easy tasks with the digging power and reach of the GX series.



## GX920

- 9'4" Digging Depth
- 141" Reach from Post Swing
- 30-100 HP Range (Tractor)
- 30-100 HP Range (Skidsteer)
- 180° Bucket Rotation
- 180° Swing Arc
- 10.5" Ground Clearance
- 850 lbs. Total Weight
- Requires Min. 5 gpm Hydraulic Flow

GX920

**\$10,018** Price does not include mounting kit or bucket.



## GX920XT

- 9'4" Digging Depth
- 11'4" Digging Depth (Extended)
- 141" Reach from Post Swing
- 164" Reach from Post Swing (Extended)
- 30-100 HP Range (Tractor)
- 30-100 HP Range (Skidsteer)
- 180° Bucket Rotation
- 180° Swing Arc
- 10.5" Ground Clearance
- 980 lbs. Total Weight
- Requires Min. 5 gpm Hydraulic Flow

GX920XT

**\$12,008** Price does not include mounting kit or bucket.



# HOW TO CONFIGURE AND PRICE YOUR COMPACT BACKHOE PACKAGE

## STEP 1 CHOOSE A BACKHOE



18-28 HP Range (Tractor)

**GE605**  
\$6,195



18-28 HP Range (Tractor)  
20-48 HP Range (Mini Skidsteer)

**GX620**  
\$7,346



30-60 HP Range (Tractor)  
30-60 HP Range (Skidsteer)

**GX720**  
\$8,478



30-100 HP Range (Tractor)  
30-100 HP Range (Skidsteer)

**GX920**  
\$10,018



30-100 HP Range (Tractor)  
30-100 HP Range (Skidsteer)

**GX920XT**  
\$12,008

## STEP 2 CHOOSE

### Tractor Mounts

#### Subframe Mount (Recommended)



4-point mount shown

For a list of available subframe mounts visit **\$1,385**  
[wallensteinequipment.com](http://wallensteinequipment.com)

A subframe mount provides the strongest way to properly and safely distribute the stress produced by a backhoe attachment. If you cannot find your tractor on the subframe list please contact your dealer for options. Some tractor/subframe combinations may require wheel spacers which are not available through Wallenstein and must be purchased at the customers expense. Note: Subframes are not mid-mount mower compatible unless specified on the subframe list.

#### 3-Point Hitch Mount



##### PT300

**\$714**

- Fits all models except GE605
- Cat I: For older low HP tractors which have no subframe available. Light duty only.

##### PT322

**\$791**

- Fits GX720, GX920 & GX920XT
- Cat II: For tractors between 70-100 HP that do not require a subframe.

Although a subframe is recommended certain tractors may not require a subframe. Contact your dealer to inquire about your specific model.





## A MOUNT

### Skidsteer Mount

#### Universal Quick Attach Plate



SQ500

**\$1,385**

- Includes flat faced couplers
- Includes turnbuckles
- Requires tieback mount



#### Tieback Mount



**\$432**

For a list of available tieback mounts visit  
[wallensteinequipment.com](http://wallensteinequipment.com)

Skidsteers require a tieback kit to properly and safely distribute the stress produced by a backhoe attachment. If you cannot find your skidsteer on the tieback list please contact your dealer for options.

### Mini Skidsteer Mount

#### Mounting Plate & Tieback Mount



**\$1,591**

For a list of available tieback mounts visit  
[wallensteinequipment.com](http://wallensteinequipment.com)

Mini skidsteers require a tieback kit to properly and safely distribute the stress produced by a backhoe attachment. If you cannot find your mini skidsteer on the tieback list please contact your dealer for options.

## STEP 3 CHOOSE A BUCKET

GE605

or

GX620

Also fits  
QC605 & QC605B



#### 9" Bucket

- 3 teeth
- Bucket Volume: 0.5115 cubic ft

BK2609

**\$461**



#### 12" Bucket

- 3 teeth
- Bucket Volume: 0.6934 cubic ft

BK2612

**\$518**



#### 15" Bucket

- 4 teeth
- Bucket Volume: 0.8749 cubic ft

BK2615

**\$546**



#### 18" Bucket

- 4 teeth
- Bucket Volume: 1.0567 cubic ft

BK2618

**\$566**

GX720

or

GX920

or

GX920XT

Also fits QC620



#### 9" Bucket

- 3 teeth
- Bucket Volume: 0.8416 cubic ft

BK2900

**\$657**



#### 12" Bucket

- 3 teeth
- Bucket Volume: 1.1694 cubic ft

BK2120

**\$675**



#### 15" Bucket

- 4 teeth
- Bucket Volume: 1.4806 cubic ft

BK2150

**\$733**



#### 18" Bucket

- 4 teeth
- Bucket Volume: 1.7912 cubic ft

BK2180

**\$766**



#### 24" Bucket

- 5 teeth
- Bucket Volume: 2.413 cubic ft

BK2240

**\$885**



#### 24" Ditching Bucket

- No teeth
- Bucket Volume: 2.413 cubic ft

BK2240D

**\$814**



# QC SKID DIGGERS

## PRODUCT FEATURES



### Skidsteer Mount

The universal quick attach plate connects easily to most skidsteers.




### Mini Skidsteer Mount

The universal mini skidsteer plate connects easily to most mini skidsteers. (QC605)  
The Bobcat mini skidsteer plate is designed specifically for Bobcat models. (QC605B)



### Curved Boom

Protects backhoe from unnecessary damage while preventing ground from falling back into the hole.

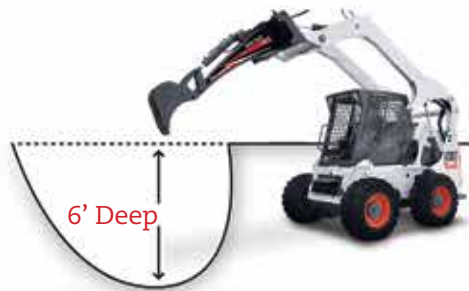

### Digging Depth

6' with a 2' flat bottom.



### Greasable Pins

Maintenance is easy with greasable pins on all pivot points.




### Bushings

To reduce wear, hardened steel bushings are installed on all the main pivot points. (QC620)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models

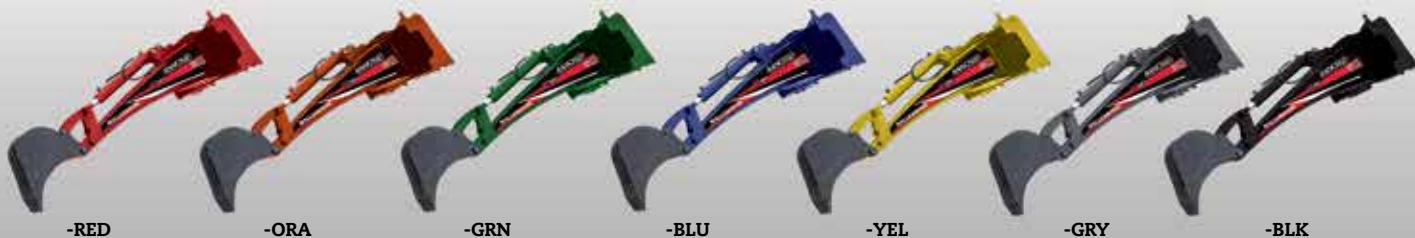



**QC****SKID  
DIGGERS**

When you need to get down to work, start digging with the QC series skid digger. Mounted to a skidsteer or mini skidsteer, the QC is a single-stick backhoe that digs up to 6 feet deep and is controlled from the cab.

**MINI SKIDSTEER****SKIDSTEER****QC605**

- 6' Digging Depth
- Includes Flat Faced Couplers
- Universal Mini Skidsteer Plate
- 182 lbs. Total Weight
- 235 lbs. Total Weight (QC605B)
- Curved Boom
- Greasable Pins

QC605B: Bobcat mini skidsteer plate

QC605 | QC605B  
**\$1,974 | \$1,974**

Price does not include bucket.

**QC620**

- 6' Digging Depth
- Includes Flat Faced Couplers
- Universal Quick Attach Plate
- 375 lbs. Total Weight
- Curved Boom
- Greasable Pins
- Hardened Steel Bushings

QC620  
**\$2,174**

Price does not include bucket.

\*For available bucket sizes see page 91



## BACKHOE ACCESSORIES



### Mechanical Thumbs



#### BT5280 \$505

Clamp on mechanical thumb  
Current Models: GE605, GX620  
Previous Models: n/a

#### BT5290 \$604

Clamp on mechanical thumb  
Current Models: GX720, GX920  
Previous Models: n/a

#### BT5330 \$604

Clamp on mechanical thumb  
Current Models: GX920XT  
Previous Models: n/a

#### BT5360 \$606

Pin on mechanical thumb  
Current Models: QC605, QC605B  
Previous Models: n/a

#### BT5310 \$604

Pin on mechanical thumb  
Current Models: QC620  
Previous Models: n/a

#### BT5250 \$461

Weld on mechanical thumb  
Universal Fit

#### BT5260 \$461

Clamp on mechanical thumb for Kubota backhoes  
Fits: BX22, BX23, BX24, BX25

#### BT5320 \$604

Clamp on mechanical thumb for Kioti backhoes  
Fits: 2475, 2485

#### BT5340 \$567

Clamp on mechanical thumb for John Deere backhoes  
Fits: 260

#### BT5350 \$567

Clamp on mechanical thumb for Massey backhoes  
Fits: CB05

#### BT5370 \$567

Clamp on mechanical thumb for Massey backhoes  
Fits: CB65

### Hydraulic Thumb



#### BT5300 \$1,551

Factory install only  
Current Models: GX720, GX920  
Previous Models: n/a

### Quick Change Bucket Adapter



#### BT7220 \$485

Quickly switch between your different buckets  
2 pins required for each additional bucket  
Current Models: GX720, GX920, GX920XT, QC620  
Previous Models: n/a

### Ripper Tooth



#### BT7230 \$472

For breaking up hard ground  
Current Models: GX720, GX920, GX920XT, QC620  
Previous Models: n/a

### Vertical Stabilizer Kit



#### BT7240 \$868

For stability in tight spaces  
Current Models: GX720, GX920, GX920XT

### Operator's Seat



#### BT7250 \$496

Required when no spin around seat available  
Current Models: GE605  
Previous Models: n/a

### Greaseable Pins



#### 3012M209 \$28

For use with BT7220  
2 pins required for each additional bucket

### Street Pad Kit



#### BP220 \$297

Current Models: GE605  
Previous Models: n/a

#### BP210 \$208

Current Models: GX620  
Previous Models: n/a

#### BP230 \$208

Current Models: GX720, GX920, GX920XT  
Previous Models: n/a

### PTO Pump Kits



#### PTO605 \$1,342

5 gpm  
Current Models: GE605  
Previous Models: n/a

#### PTO62 \$1,385

7 gpm  
Current Models: GX620  
Previous Models: n/a

#### PTO72 \$1,385

7 gpm  
Current Models: GX720, GX920, GX920XT  
Previous Models: n/a





# GENERATORS & WELDERS

GAS GENERATORS | DIESEL GENERATORS | WELDERS





# GAS GENERATORS

## PRODUCT FEATURES



### Backup Power Series

Wallenstein offers a wide range of backup power generators that are suitable to power your home in an emergency. (WHC & WHS models)



### Jobsite Rated Series

Wallenstein offers a wide range of contractor grade generators that include GFCI protection. (WCC & WCS models)

POWERED by  
**HONDA**



### Honda Engine

All Wallenstein gas generators are powered by Honda engines.



### Electric Start

(select models, see specs for details)



### Auto-Idle

Generator switches to idle mode when no load is present. (select models, see specs for details)



### Full Power Switch

Directs all power into 120V outlet for maximum output. (select models, see specs for details)



### High Capacity Fuel Tank

For a longer run time. (WHS & WCS models)



### Rubber Tires & Folding Handle

Allows easy transportation of your generator. (WHS & WCS models)



### Sky Hook

Bolted right to the frame to allow for easy lifting. (WHS & WCS models)

## CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models



-RED



-ORA



-GRN



-BLU



-YEL



-GRY



-BLK



## GAS POWERED GENERATORS

When bad weather strikes, don't be left in the dark. Be confident with Wallenstein's reliable lineup of emergency backup generators. For contractors, Wallenstein also offers a full line of jobsite rated generators with full GFCI protection.



### WHC2500

- 2400 Max. Watts
- 2000 Continuous Watts
- 16.5 Continuous Amps (120V)
- 160 CC Honda GC160 Engine
- 1.8 L Fuel Tank Capacity
- 68 dBA at 23'
- 2.75 Hours Run Time at Half Load
- 2.25 Hours Run Time at Full Load
- 4 x 120V 20A Outlets (2 Duplex, NEMA 5-20R)
- 1 x 12A Pop-out Breaker
- Recoil Start
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 22" x 16" x 16"
- 71 lbs. Total Weight

WCC2500: Includes GFCI Receptacles

WHC2500	WCC2500
<b>\$1,025</b>	<b>\$1,047</b>



### WHC3000

- 2500 Max. Watts
- 2100 Continuous Watts
- 18.75 Continuous Amps (120V)
- 163 CC Honda GX160 Engine
- 3.1 L Fuel Tank Capacity
- 68 dBA at 23'
- 3 Hours Run Time at Half Load
- 2.5 Hours Run Time at Full Load
- 4 x 120V 20A Outlets (2 Duplex, NEMA 5-20R)
- 1 x 15A Pop-out Breaker
- Recoil Start
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 22" x 16" x 16"
- 80 lbs. Total Weight

WCC3000: Includes GFCI Receptacles

WHC3000	WCC3000
<b>\$1,143</b>	<b>\$1,143</b>



### WHC5000

- 5000 Max. Watts
- 4250 Continuous Watts
- 35.5 Continuous Amps (120V)
- 17.75 Continuous Amps (240V) (WHC5000 only)
- 270 CC Honda GX270 Engine
- 6 L Fuel Tank Capacity
- 70.5 dBA at 23'
- 4 Hours Run Time at Half Load
- 3 Hours Run Time at Full Load
- 2 x 120V 20A Outlets (1 Duplex, NEMA 5-20R) (WHC5000 only)
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R) (WHC5000 only)
- 4 x 120V 20A Outlets (2 Duplex, NEMA 5-20R) (WCC5000 only)
- 2 x 15A Pop-out Breakers
- Recoil Start
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 25.5" x 20" x 21.5"
- 118 lbs. Total Weight

WCC5000: Includes GFCI Receptacles

WHC5000	WCC5000
<b>\$1,559</b>	<b>\$1,559</b>



## GAS POWERED GENERATORS



### WHS3000

- 2500 Max. Watts
- 2100 Continuous Watts
- 18.75 Continuous Amps (120V)
- 163 CC Honda GX160 Engine
- 18 L Fuel Tank Capacity
- 68 dBA at 23'
- 16.6 Hours Run Time at Half Load
- 12.5 Hours Run Time at Full Load
- 2 x 120V 20A Outlets (1 Duplex, NEMA 5-20R)
- 1 x 120V 30A Outlet (Twist Lock, NEMA L5-30R)
- 15A SPST Main Breaker
- Recoil Start
- Rubber Tires
- Folding Handle
- Skyhook
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 24.5" x 24" x 22.75"
- 144 lbs. Total Weight



### WHS5000

- 5000 Max. Watts
- 4250 Continuous Watts
- 35.5 Continuous Amps (120V)
- 17.75 Continuous Amps (240V)
- 270 CC Honda GX270 Engine
- 26 L Fuel Tank Capacity
- 70.5 dBA at 23'
- 12.3 Hours Run Time at Half Load
- 9.1 Hours Run Time at Full Load
- 4 x 120V 20A Outlets (2 Duplex, NEMA 5-20R)
- 1 x 120V 30A Outlet (Twist Lock, NEMA L5-30R)
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R)
- 2 x 15A Pop-out Breakers
- 17.5A DPST Main Breaker
- Auto Idle
- Full Power Switch
- Hourmeter
- Recoil Start
- Rubber Tires
- Folding Handle
- Skyhook
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 30.8" x 27.4" x 26.5"
- 205 lbs. Total Weight



### WHS7000

- 6500 Max. Watts
- 6250 Continuous Watts
- 52 Continuous Amps (120V)
- 26 Continuous Amps (240V)
- 389 CC Honda GX390 Engine
- 26 L Fuel Tank Capacity
- 70.5 dBA at 23'
- 12.4 Hours Run Time at Half Load
- 7.2 Hours Run Time at Full Load
- 4 x 120V 20A Outlets (2 Duplex, NEMA 5-20R)
- 1 x 120V 30A Outlet (Twist Lock, NEMA L5-30R)
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R)
- 2 x 15A Pop-out Breakers
- 26A DPST Main Breaker
- Auto Idle
- Full Power Switch
- Hourmeter
- Electric Start (Requires Z93201 Battery, Not Included)
- Rubber Tires
- Folding Handle
- Skyhook
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 30.8" x 27.4" x 26.5"
- 270 lbs. Total Weight

WCS3000: Includes GFCI Receptacles

WCS5000: Includes Full Panel GFCI

WCS7000: Includes Full Panel GFCI

WHS3000  
**\$2,162**

WCS3000  
**\$2,487**


WHS5000  
**\$3,027**

WCS5000  
**\$3,460**

WHS7000  
**\$3,785**

WCS7000  
**\$4,109**



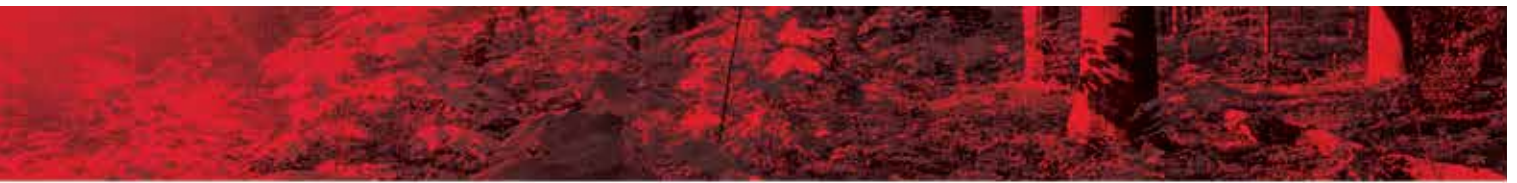

## WHS12000

- 12000 Max. Watts
- 10000 Continuous Watts
- 84 Continuous Amps (120V)
- 42 Continuous Amps (240V)
- 688 CC Honda GX630 Engine
- 46 L Fuel Tank Capacity
- 77 dBA at 23'
- 10.2 Hours Run Time at Half Load
- 6.8 Hours Run Time at Full Load
- 4 x 120V 20A Outlets (2 Duplex, NEMA 5-20R)
- 1 x 120V 30A Outlet (Twist Lock, NEMA L5-30R)
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R)
- 1 x 240V 50A Outlet (NEMA 6-50R)
- 1 x 120/240V 50A Outlet (NEMA 14-50R)
- 2 x 15A Pop-out Breakers
- 42A DPST Main Breaker
- Auto Idle
- Hourmeter
- Electric Start (Requires Z93201 Battery, Not Included)
- Rubber Tires
- Folding Handle
- Skyhook
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 32.3" x 31" x 35.7"
- 407 lbs. Total Weight

WCS12000: Includes Full Panel GFCI

WHS12000      WCS12000  
**\$5,407      \$5,731**



## WHS14000

- 12800 Max. Watts
- 12000 Continuous Watts
- 100 Continuous Amps (120V)
- 50 Continuous Amps (240V)
- 688 CC Honda GX690 Engine
- 46 L Fuel Tank Capacity
- 77 dBA at 23'
- 8.6 Hours Run Time at Half Load
- 5.7 Hours Run Time at Full Load
- 4 x 120V 20A Outlets (2 Duplex, NEMA 5-20R)
- 1 x 120V 30A Outlet (Twist Lock, NEMA L5-30R)
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R)
- 1 x 240V 50A Outlet (NEMA 6-50R)
- 1 x 120/240V 50A Outlet (NEMA 14-50R)
- 2 x 15A Pop-out Breakers
- 50A DPST Main Breaker
- Auto Idle
- Hourmeter
- Electric Start (Requires Z93201 Battery, Not Included)
- Rubber Tires
- Folding Handle
- Skyhook
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 32.3" x 31" x 35.7"
- 427 lbs. Total Weight

WCS14000: Includes Full Panel GFCI

WHS14000      WCS14000  
**\$5,948      \$6,164**



**DK**
**DIESEL  
GENERATORS**

For reliable portable power on a job site or industrial application, Wallenstein's diesel generators provide longer run times at a lower operating cost.


**Electric Start**

**Full Power Switch**

Directs all power into 120V outlet for maximum output.


**Load Monitor**

A visual display notifies you when more load is required or if the generator is overloaded.

# CHOOSE YOUR COLOR

When ordering, please use 3 letter color designation behind models


**-RED**

**-ORA**

**-GRN**

**-BLU**

**-YEL**

**-GRY**

**-BLK**
**KOHLER**

**DK5000E**

- 5000 Max. Watts
- 3750 Continuous Watts
- 31.25 Continuous Amps (120V)
- 15.6 Continuous Amps (240V)
- 349 CC Kohler KD350 Engine
- 20 L Fuel Tank Capacity
- 77 dBA at 23'
- 22 Hours Run Time at Half Load
- 14 Hours Run Time at Full Load
- 4 x 120V 20A Outlets
- (2 Duplex, GFCI NEMA 5-20R)
- 1 x 120V 30A Outlet (Twist Lock, NEMA L5-30R)
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R)
- 2 x 15A Pop-out Breakers
- 1 x 20A Pop-out Breaker
- 20A DPST Main Breaker
- Electric Start (Requires Z93201 Battery, Not Included)
- Full Power Switch
- Load Monitor
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 28" x 20" x 23"
- 208 lbs. Total Weight

DK5000E

**\$5,358**
**Kubota**

**DK7300E**

- 7300 Max. Watts
- 6000 Continuous Watts
- 50 Continuous Amps (120V)
- 25 Continuous Amps (240V)
- 416 CC Kubota OC95E4 Engine
- 20 L Fuel Tank Capacity
- 77 dBA at 23'
- 16 Hours Run Time at Half Load
- 9 Hours Run Time at Full Load
- 4 x 120V 20A Outlets
- (2 Duplex, GFCI NEMA 5-20R)
- 1 x 120V 30A Outlet (Twist Lock, NEMA L5-30R)
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R)
- 2 x 15A Pop-out Breakers
- 1 x 20A Pop-out Breaker
- 20A DPST Main Breaker
- Electric Start (Requires Z93201 Battery, Not Included)
- Full Power Switch
- Load Monitor
- Low Oil Warning Lamp
- Dimensions (LxWxH) 31" x 20" x 23"
- 270 lbs. Total Weight

DK7300E

**\$7,018**



**WDC****WELDER  
GENERATORS**

For on the job welding repairs at the farm or construction site, trust Wallenstein's portable welder generators.



**Helmet & 25' Welding Cable Included**



**Electric Start**

**50%  
DUTY CYCLE**

**50% Duty Cycle**  
5 full minutes weld time, then 5 minutes of rest time.



**Auto Idle**  
Generator switches to idle mode when no load is present.

**CHOOSE YOUR COLOR**

When ordering, please use 3 letter color designation behind models



**-RED**



**-ORA**



**-GRN**



**-BLU**



**-YEL**



**-GRY**



**-BLK**

**POWERED by  
HONDA™**

**WDC160****Welder Specifications**

- 160 Max. Amps

**Generator Specifications**

- 3500 Max. Watts
- 3000 Continuous Watts
- 24 Continuous Amps (120V)
- 12 Continuous Amps (240V)
- 389 CC Honda GX340 Engine
- 6.1 L Fuel Tank Capacity
- 70.5 dBA at 23'
- 4 Hours Run Time at Half Load
- 3 Hours Run Time at Full Load
- 2 x 120V 20A Outlets
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R)
- 2 x 15A Pop-out Breakers
- Recoil Start
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 29" x 20" x 23"
- 183 lbs. Total Weight

WDC160

**\$3,287**

**WDC190E****Welder Specifications**

- 190 Max. Amps

**Generator Specifications**

- 3500 Max. Watts
- 3000 Continuous Watts
- 24 Continuous Amps (120V)
- 12 Continuous Amps (240V)
- 389 CC Honda GX390 Engine
- 6.1 L Fuel Tank Capacity
- 70.5 dBA at 23'
- 3.5 Hours Run Time at Half Load
- 2.75 Hours Run Time at Full Load
- 2 x 120V 20A Outlets
- 2 Duplex, GFCI NEMA 5-20R
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R)
- 2 x 15A Pop-out Breakers
- Electric Start (Requires Z93201 Battery, Not Included)
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 29" x 20" x 23"
- 197 lbs. Total Weight

WDC190E

**\$3,785**

**WDC190EA****Welder Specifications**

- 190 Max. Amps

**Generator Specifications**

- 3500 Max. Watts
- 3000 Continuous Watts
- 24 Continuous Amps (120V)
- 12 Continuous Amps (240V)
- 389 CC Honda GX390 Engine
- 15.5 L Fuel Tank Capacity
- 70.5 dBA at 23'
- 12 Hours Run Time at Half Load
- 7 Hours Run Time at Full Load
- 4 x 120V 20A Outlets (2 Duplex, GFCI NEMA 5-20R)
- 1 x 120/240V 30A Outlet (Twist Lock, NEMA L14-30R)
- 2 x 15A Pop-out Breakers
- Auto Idle
- Electric Start (Requires Z93201 Battery, Not Included)
- Automatic Engine Shut Down if Oil Level is Low
- Dimensions (LxWxH) 29" x 20" x 28"
- 213 lbs. Total Weight

WDC190EA

**\$4,553**



## GENERATOR ACCESSORIES



### Generator Power Cord



- G20211** \$173  
10', 30 amp
- G20212** \$220  
20', 30 amp
- G20213** \$269  
25', 30 amp

### Welding Cables



- Z63107** \$333  
25' with connector and electrode holder
- Z63108** \$293  
15' with connector and ground clamp

### Wheel Kit



- WK210** \$172  
10" Tires  
For models that do not include wheels
- WK214** \$245  
14" Tires  
For models that do not include wheels

### Battery



- Z93201** \$102  
250 CCA





## Wood Chippers

Model	Page	Price
<b>BX36S</b>	6	\$2,999
<b>BX52S</b>	6	\$3,785
<b>BX72S</b>	7	\$5,407
<b>BX102S</b>	7	\$7,695
<b>BX52R</b>	8	\$6,794
<b>BX52RI</b>	8	\$8,530
<b>BX72R</b>	8	\$9,733
<b>BX72RI</b>	8	\$11,541
<b>BX102R</b>	9	\$12,221
<b>BX102RI</b>	9	\$13,951
<b>BX102RP</b>	9	\$14,709
<b>BX102RPI</b>	9	\$16,439
<b>BXM32</b>	10	\$3,872
<b>BXM42</b>	10	\$5,309
<b>BXH42</b>	11	\$7,035
<b>BXMT3209</b>	14	\$4,599
<b>BXMT3213</b>	14	\$5,683
<b>BXMT4224</b>	14	\$10,922
<b>BXMT4238</b>	14	\$12,650
<b>BXT4213</b>	15	\$8,063
<b>BXT4224</b>	15	\$10,211
<b>BXT6224</b>	15	\$12,143
<b>BXT6238</b>	15	\$13,909
<b>BXC34</b>	17	\$2,079
<b>BXMC34S</b>	17	\$2,378
<b>BXMC34B</b>	17	\$2,595

## Commercial Chippers

Model	Page	Price
<b>BXTR6438F</b>	22	\$24,359
<b>BXTR6438P</b>	22	\$24,814

## Log Splitters

Model	Page	Price
<b>WE225</b>	28	\$2,079
<b>WE235</b>	28	\$2,287
<b>WX520</b>	29	\$2,599
<b>WX520L</b>	29	\$2,703
<b>WX520T</b>	29	\$2,807
<b>WX540</b>	29	\$2,911
<b>WX540L</b>	29	\$3,015
<b>WX910</b>	30	\$3,592
<b>WX910L</b>	30	\$3,657
<b>WX910T</b>	30	\$3,769
<b>WX920</b>	30	\$4,443
<b>WX930</b>	30	\$4,628
<b>WX950</b>	31	\$4,580
<b>WX960</b>	31	\$5,320
<b>WX970</b>	31	\$5,812
<b>WX980</b>	31	\$3,885
<b>WX980L</b>	31	\$3,950
<b>WXR720</b>	33	\$3,223
<b>WXR720L</b>	33	\$3,296
<b>WXR740</b>	33	\$3,617
<b>WXR740L</b>	33	\$3,686
<b>WX310</b>	35	\$1,378
<b>WX310C</b>	35	\$1,516
<b>WX320</b>	35	\$2,460
<b>WX320C</b>	35	\$2,594
<b>WX330</b>	36	\$2,749
<b>WX330C</b>	36	\$2,890
<b>WX350</b>	36	\$1,378
<b>WX350C</b>	36	\$1,516
<b>WX360</b>	37	\$1,971
<b>WX360C</b>	37	\$2,113
<b>WX370</b>	37	\$1,770
<b>WX370C</b>	37	\$1,910
<b>WX410</b>	39	\$1,779
<b>WX430</b>	39	\$3,080
<b>WX440</b>	40	\$1,958
<b>WX450</b>	40	\$3,397
<b>WX460</b>	41	\$2,694
<b>WX470</b>	41	\$2,034
<b>WX210</b>	43	\$1,679
<b>WX210B</b>	43	\$1,679

## Firewood Processors

Model	Page	Price
<b>WP240</b>	48	\$9,586
<b>WP270</b>	48	\$11,503
<b>WP840</b>	49	\$13,408
<b>WP870</b>	49	\$15,337

## Skidding Winches

Model	Page	Price
<b>FX35</b>	54	\$3,317
<b>FX66</b>	54	\$4,048
<b>FX85</b>	55	\$4,522
<b>FX85R</b>	55	\$6,661
<b>FX110</b>	55	\$5,285
<b>FX110R</b>	55	\$7,552
<b>FX140</b>	55	\$6,219
<b>FX140R</b>	55	\$8,392

## Skidding Plates

Model	Page	Price
<b>FXP20</b>	57	\$963
<b>FXP30</b>	57	\$1,204

## Trailers & Log Loaders

Model	Page	Price
<b>LT30</b>	62	\$6,624
<b>LT30A</b>	62	\$8,790
<b>LT30H</b>	62	\$7,990
<b>LT30HA</b>	62	\$8,990
<b>LX95</b>	63	\$8,313
<b>LX95P</b>	63	\$ 8,313
<b>LX95W</b>	63	\$10,423
<b>LX95PW</b>	63	\$10,635
<b>LT60</b>	64	\$8,528
<b>LT60H</b>	64	\$9,138
<b>LX115</b>	65	\$13,326
<b>LX115W</b>	65	\$15,437

\*power source required

## Log Grapples

Model	Page	Price
<b>LXG320S</b>	72	\$3,327
<b>LXG330S</b>	72	\$7,903
<b>LXG320R</b>	73	\$4,367
<b>LXG330R</b>	73	\$9,359
<b>LXG330RP</b>	73	\$14,767
<b>LXG420S</b>	74	\$4,159
<b>LXG430S</b>	74	\$8,631
<b>LXG420R</b>	75	\$6,239
<b>LXG430R</b>	75	\$10,379
<b>LXG430RP</b>	75	\$16,307
<b>LXG210S</b>	76	\$2,969
<b>LXG210SB</b>	76	\$2,969

## Manure Spreaders

Model	Page	Price
<b>MX25</b>	80	\$3,872
<b>MX50G</b>	80	\$5,735
<b>MX80G</b>	80	\$6,284
<b>MX50P</b>	81	\$5,735
<b>MX80P</b>	81	\$6,284
<b>MX130</b>	81	\$14,039
<b>MX130T</b>	81	\$14,039

## Backhoes

Model	Page	Price
<b>GE605</b>	85	\$6,195
<b>GX620</b>	88	\$7,346
<b>GX720</b>	88	\$8,478
<b>GX920</b>	89	\$10,018
<b>GX920XT</b>	89	\$12,008
<b>QC605</b>	93	\$1,974
<b>QC605B</b>	93	\$1,974
<b>QC620</b>	93	\$2,174

\*mounting kit and bucket required

## Generators

Model	Page	Price
<b>WHC2500</b>	97	\$1,025
<b>WCC2500</b>	97	\$1,047
<b>WHC3000</b>	97	\$1,143
<b>WCC3000</b>	97	\$1,143
<b>WHC5000</b>	97	\$1,559
<b>WCC5000</b>	97	\$1,559
<b>WHS3000</b>	98	\$2,162
<b>WCS3000</b>	98	\$2,487
<b>WHS5000</b>	98	\$3,027
<b>WCS5000</b>	98	\$3,460
<b>WHS7000</b>	98	\$3,785
<b>WCS7000</b>	98	\$4,109
<b>WHS12000</b>	99	\$5,407
<b>WCS12000</b>	99	\$5,731
<b>WHS14000</b>	99	\$5,948
<b>WCS14000</b>	99	\$6,164
<b>DK5000E</b>	100	\$5,358
<b>DK7300E</b>	100	\$7,018
<b>WDC160</b>	101	\$3,287
<b>WDC190E</b>	101	\$3,785
<b>WDC190EA</b>	101	\$4,553





**WALLENSTEINEQUIPMENT.COM**



Manufactured by EMB MFG Inc.  
4144 Boomer Line  
St. Clements, ON N0B 2M0  
Canada