


SIMPLY THE BEST MOWERS IN THE FIELD



TWO GREAT PRODUCTS. ONE AWESOME SUPERMOWER.

If you're looking for reliable equipment that you can trust, look no further than Progressive Turf Equipment. For nearly 15 years, we've been helping our customers all over the world tackle big mowing jobs with unmatched performance and guaranteed results.

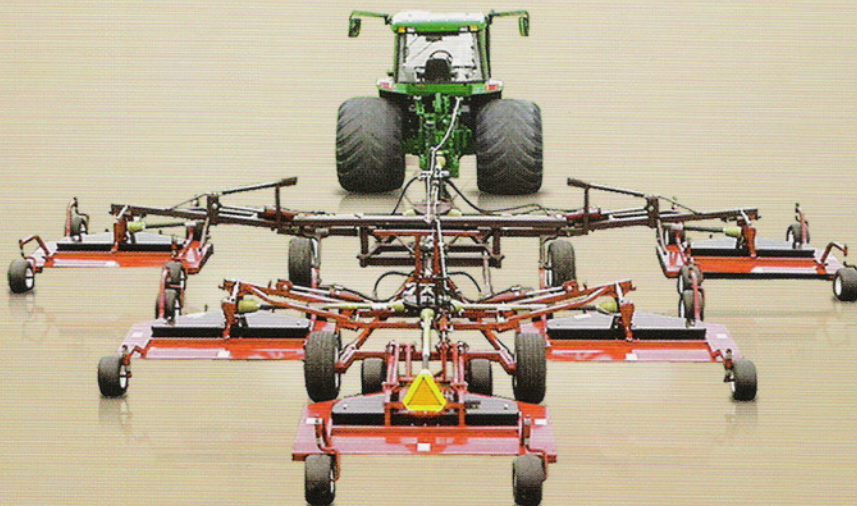

PROGRESSIVE
TURF EQUIPMENT INC.


PRO-MAX 36 SYSTEM

THE BEST CUT IN THE FIELD.

The complete **Pro-Max 36 Mowing System** combines two of our most successful products, the **TD92** 22' mower and the **Pro-Max 36**, to create a 36' supermower. Towed by a 100 hp tractor at 6 mph, the **Pro-Max 36 Mowing System** will cut 26 acres an hour, or in excess of 64% more than the **TD92**. What's more, many key components are found on both the **Pro-Max 36** and the **TD92**, thus spare parts requirements are kept to a minimum.

Like all of our products, we've built the **Pro-Max 36 Mowing System** to offer the very best in performance and durability. With deep deck skirts and high lift blades, the unit will produce an even cut with smooth dispersal that won't leave windrows in wet or dry conditions. Best of all, although a large machine, the **Pro-Max 36** has a footprint of less than seven pounds per square inch.

When you require a large acreage mowing machine, attach your **TD92** to a **Pro-Max 36** and enjoy years of reliable mowing with the best productivity in the industry. ♦

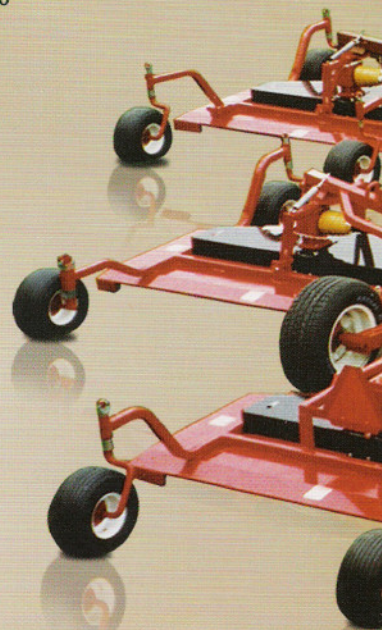

ADJUSTABLE OVERLAP

Easy 4" adjustment for users who make sharp turns or follow pivot tracks. Eliminates strips of uncut grass.

WING FOLD LOCKOUT

Holds wings in place for safe transport when wing is folded.

TRANSPORT WIDTH & HEIGHT

13 ft. transport width
13 ft. transport height

SERVICE SAFETY CHAIN

Install to support wing decks safely at the ideal height for servicing blades, spindles, etc.

REAR SLIDING DRAW BAR

For easy one-man connection of the **Pro-Max 36** to the **TD92**.

PRO-MAX 36


The **Pro-Max 36** component converts your **TD92** into a supermower. Featuring the same heavy duty construction as our complete line of turf machines, the **Pro-Max 36** works with the **TD92** to produce a 36' cut in one pass! Fully adjustable and easy to service, the **Pro-Max 36** is a great way to increase your mowing speed and productivity. In addition, the **TD92** can be easily disconnected and used for smaller jobs. ♦

TD92 TRI-DECK

For everyday maintenance mowing, you can't beat the **TD92**. At 22', this is a tough machine that will stand up to heavy daily use for many years, yet provide a smooth even cut unequalled in the industry. Used primarily in sod production throughout the world, the **TD92** is becoming the benchmark to which other mowers must conform. ♦



PRO-MAX 36

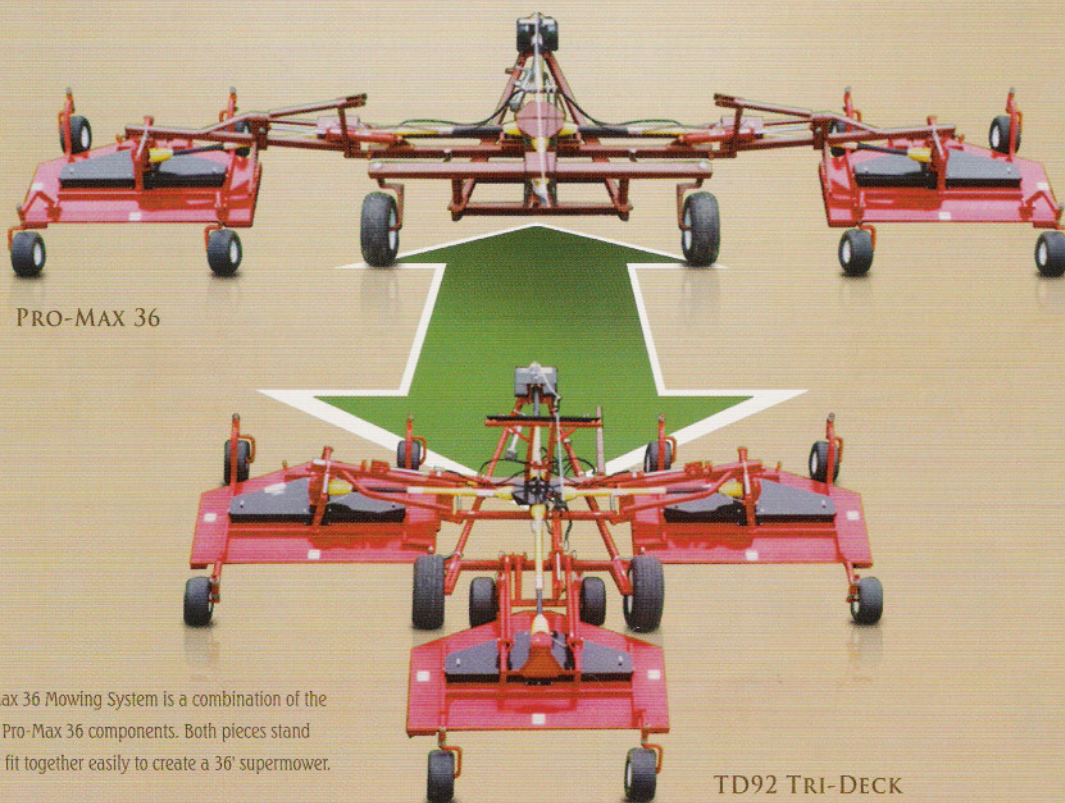

TD92 TRI-DECK

The Pro-Max 36 Mowing System is a combination of the TD92 and Pro-Max 36 components. Both pieces stand alone, but fit together easily to create a 36' supermower.




SINGLE PIECE STEEL DECK

Formed and welded with bracing at stress areas to provide maximum strength with no warping.



HEAVY DUTY GEAR BOX

With case hardened gears for durability and reliability. 2 year warranty.

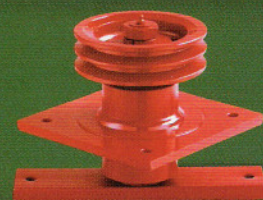

HEAVY DUTY BLADE SPINDLE ASSEMBLIES

Has greaseable ball bearings for long life. Drop out design with welded blade support bar for two bolt blade attachment.



EXCELLENT FLOTATION

Obtained with 12 low pressure wheels all staggered to provide a footprint of less than 7 lb. per square inch.



CUTTING HEIGHT ADJUSTMENT

Is easily achieved by moving spacers either above or below the support tube in 3/8" or 1" increments.

PRO-MAX 36 SYSTEM

Our signature large acreage mowing system, the **Pro-Max 36**, features solid construction and smooth operation for a clean, finished cut every time. Built to our exceptional standard, the **Pro-Max 36 Mowing System** guarantees the same high quality and low maintenance that the industry has come to expect from **Progressive Turf Equipment**. ♦



PRO-MAX 36 SPECIFICATIONS

Cutting width	36'
Cutting height	¾" to 5"
Recommended PTO HP	80 to 110 (or 64% more than currently used)
Hydraulics	Requires 2 double acting outlets. All hoses supplied to tractor. Tractor must have hydraulic float position.
Transport width	13'
Height (folded)	13'
Length	Pro-Max 36 only: 13'2" With 22' mower: 29'8"
Ground clearance	8"
Deck flexibility	25° up, 15° down
Number of tires	Pro-Max 36: 2 road wheels, 8 deck wheels Total System: 4 road wheels, 18 deck wheels
Mowing capacity (MPH)	2 mph: 8.8 Acres/hr 4 mph: 17.5 Acres/hr 6 mph: 26 Acres/hr 7.5 mph: 32.8 Acres/hr (assumes no stops or overlap)
Weight	4600 lbs
Tongue weight	1440 lbs in transport position 700 lbs in mowing position

Paint finish	Electrostatically applied paint with oven-baked finish
Deck	See TD92 specifications for mower deck information
Frame	Hollow structural steel tubing with supports at high stress areas to achieve maximum strength
Axles	Two specifically designed castors with 6000 lb rating for transport wheels
Wheels	6 bolt with 6" bolt circle
Tires	2 of P275/60SR 15" automotive style radials
Cylinders	Wing lift: 2 of 3.5" by 24"
Screw jack	5000 lb top-wind jack for easy hook-up
Main gear box	4 shaft gear box with 1⅜" 6 spline shafts
PTO shafts	Telescoping, agricultural PTO shafts with proper safety shields 1⅜"–6 spline quick disconnect yokes on both ends with ring lock collars
Input PTO	Category # 6 H.D.
Deck PTO	Category # 3 H.D.