



neary
TECHNOLOGIES




200



Bedknife mounts on adjustable center supports with adjustable alignment stops.



Stationary grinding head gives you accurate production grind after grind. Adjustable wheel guard for added safety.



Roller bearing guided carriage rides on precision ground, hard chromed, 1.75" diameter rails.



Optional pneumatic auto traverse increases productivity and reduces operator fatigue.

Specifications


Overall	84" long x 24" wide x 62" high
Shipping	60" long x 32" wide x 78" high, 87 cubic feet
Weight	310#
Power	115/220 volts, 60/50 hertz, single phase, 15 amp circuit
Grinding Wheel	6" OD/4" OD x 1-1/4" ID x 2" thick 46 grit type 6
Grinding Motors	1/2 HP 3450 RPM
Order Number	2000901

Standard Features

Frame Design	Fabricated steel
Travel	Manual
Infeed	Manual
Carriage	Fabricated steel riding on roller bearings
Bedknife Support	Bedknife mounts on adjustable center supports with adjustable alignment stops

Optional Equipment

Diamond Dresser	Hand held
Magnetic Angle Finder	Used to adjust for factory recommended grind angles
Mist Coolant Kit	Keeps bedknife cool during grinding 20510
Kit, Automatic Travel	Order number 20520

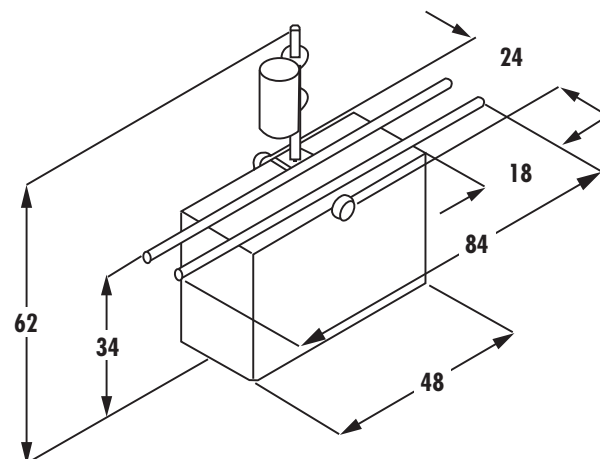

Neary continually changes and improves its products based on the needs of the customer, Neary reserves the right to change specifications without notice.