



GreensGroomer®
WORLDWIDE

SPRING TINE RAKE
for synthetic turf

greensgroomer.com



PROPER TURF MAINTENANCE

Designed as an attachment to the Synthetic Sports Turf Groomer, the Spring Tine Rake is an important part of synthetic turf conditioning. In-filled turf systems will compact with use. The Spring Tine Rake moves through the turf profile to lift and de-compact the infill. The more frequent a field is used, the more frequent raking and groomer should occur.

FRONT OR REAR MOUNT

The Spring Tine Rake is available in two different models. The Rake itself is the same for both units, with different hardware for attaching to the Synthetic Sports Turf Groomer.

The attachment points allow the Rake to be setup on current and legacy Synthetic Sports Turf Groomers — (the Original Model 720 and the Model 920 introduced in 2014).

NO DAMAGE TO TURF

The Spring Tine Rake will not damage the synthetic turf. At the factory setting, the Rake will comb through the turf and in-fill in the upper .5" to .75" of the turf profile. A more aggressive setting will drop the tines another .25", far above the synthetic turf backing and seams.

PRODUCT FEATURES

The Spring Tine Rake consists of 3 tine shafts loaded with 42 adjustable tines set at 7/8 inch spacing. The tines are 3/16" in diameter with a 40° tip bend.

The adjustment of the tines is controlled through shaft bolts at both ends of the rake. Loosening the bolts allows for rotation to a more aggressive or less aggressive angle. Retighten and you're ready to go.

REAR FINISHING BRUSH

A part of the raking system is the Rear Brush Attachment, which performs a final brush after raking and grooming.




PRODUCT BACKGROUND

We design and fabricate our equipment with an eye towards indestructibility. We know that equipment can take a real beating, so the structural elements and materials are specified for maximum strength and longevity in mind.

PRODUCT SERVICE & SUPPORT

All GreensGroomer equipment is fabricated and assembled in Indianapolis Indiana with high-quality materials and procedures from experienced craftsmen and personnel. Our equipment is prepped and crated for quick order processing and shipment. With a central domestic location, we can minimize freight across the US and have international shipments prepared for containers on both coasts.

Distribution is handled by a global network of dealers, ready to serve your equipment needs. Should you have any product questions or require parts for your existing GreensGroomer equipment, don't hesitate to contact our Customer Service Department at 888-298-8852.

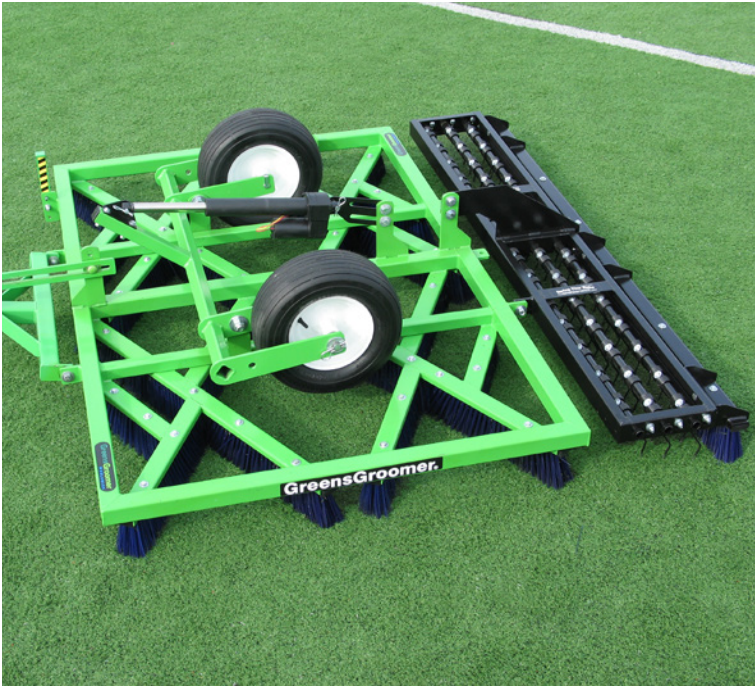

SPECIFICATIONS

Model	STR, STR4
Main Frame	10 gauge steel construction
Length	74-1/2 inches
Width	10-5/8 inches
Weight	95 lbs.
Finish	Powder coat with 6-step pre-wash including degreaser and anti rust coating
Tines	3/16 diameter w/ 40° tip bend
Shipping Crate	76" x 22" x 21"
Crated Weight	150 lbs.